

Signlighter

SL SERIES

The Signlighter provides LED or fluorescent illumination for vertical surfaces with close mounting requirements. The unique fixture design provides greater lumen output as the illuminated surface becomes farther from the fixture, providing even illumination for signage, stack lighting, or wallwashing applications. Mounting arms may be customized as required. The remote driver/ballast allows a minimal fixture profile. The Signlighter is suitable for wet locations when aimed in a downward direction, or facing upwards with optional acrylic shield.



The Signlighter length may be varied to meet the job requirements.



Many applications suit the Signlighter's versatile capabilities.



End mounting brackets may be modified to suit unique conditions.



Optional acrylic shielding for use when fixture is aimed upwards in exterior applications.



C.W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com

Signlighter

SL SERIES

SPECIFICATIONS

Construction

- Fixture housing is extruded aluminum; maximum continuous length is 10' ft. • Finish is metallic aluminum polyester coating. Other finishes are available • Lens is clear acrylic for LED and linear prismatic for fluorescent
- Housing is adjustable for vertical light distribution • Suitable for wet locations with lamp above lens • ETL/cETL listed.

Electrical


- Fixture is wired for LED, T8, T5, or T5 HO fluorescent lamp(s), available in various lengths, as required • Remote driver and electronic ballast are universal voltage. Flexible conduit not included.

Mounting

- Brackets mount with two screws (not included)
- Left bracket to be mounted over conduit flush with wall, unless otherwise specified • Remote driver/ballast enclosure to be within 18' of lamp

How to Specify

1. Select catalog number and add length required.
2. Add suffixes for options required to meet job conditions.

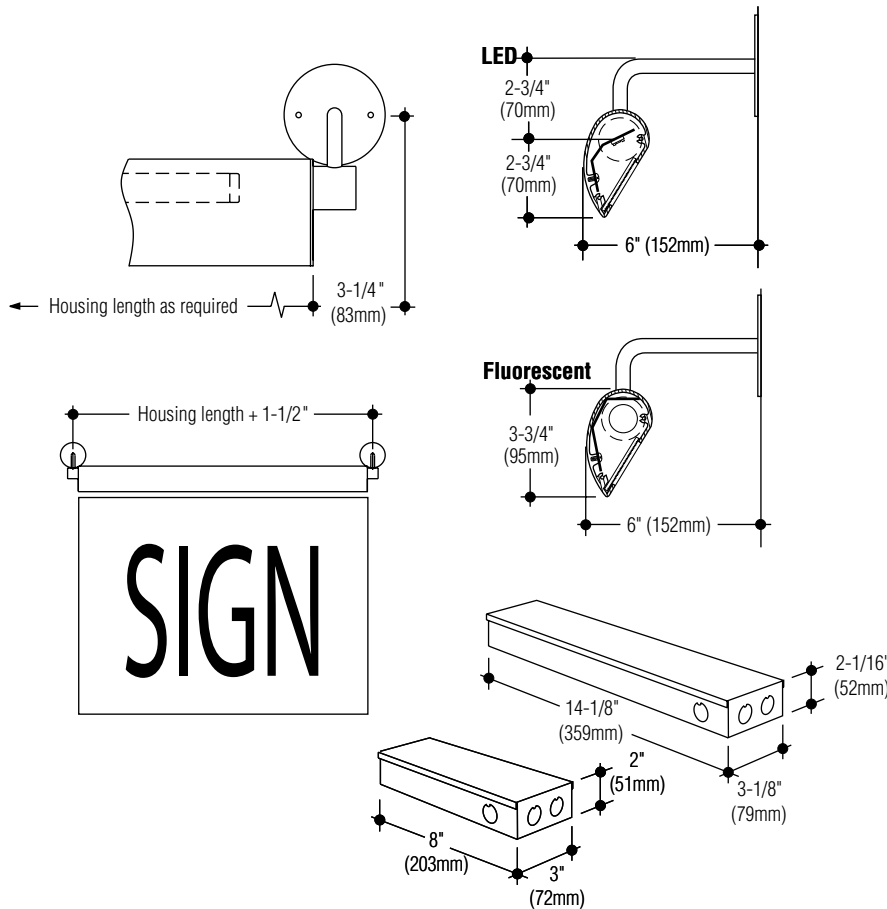

Catalog Number

Lamp

LED 6.0W, per foot (503 lm @ 3000°K)	SL- (Housing length): _____	-LED
LED/HO 14.4W, per foot (860 lm @ 3000°K)	SL- (Housing length): _____	-LED-HO
T8 fluor., sizes to fit housing length	SL- (Housing length): _____	-T8
T5 fluor., sizes to fit housing length	SL- (Housing length): _____	-T5
T5/HO fluor., sizes to fit housing length	SL- (Housing length): _____	-T5-HO

- Notes: 1. Housing length must be at least 3½" more than the nominal lamp length.
 Example: SL-39½" is minimum for 36" F25T8 lamp.
2. Maximum continuous housing length is 12' ft. (3658 mm)

Options

Alternate Arms Length:

Add suffix **-ARM**/(specify arm length).

Cable Support: Recommended for use with long mounting arms. Add suffix **-CS**.

Alternate Painted Finishes:

Black, add suffix **-BLK**.

White, add suffix **-WHT**.

Custom color. Specify. Add suffix **-CC**

Brushed Natural Finish: Satin clear anodized.

Add suffix **-BNF**.

Weatherproof: Standard with lens below lamp. To add acrylic shield when lens is above lamp.

Add suffix **-WU**.

LED color: 4000°K (584 lm). Add suffix **-4K**



C.W. Cole & Company, Inc.
 2560 N. Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com