

Exits

Interior/Exterior Applications



KBRLD-612-RED-120



KCRL-612-GRN-277-A2



KWSRL-612-GRN-120



KSRL-612-RED-120

Krystal
Edgelighted Exit Signs

SPECIFICATIONS

Description

The Krystal exit signs offers a stylish design suitable for a variety of applications. The aluminum construction is both visually pleasing and possesses corrosion-resistance qualities. The construction is designed so the sign will remain attractive and functional with minimal maintenance requirements.

Features

Construction is cast aluminum with a natural satin finish. There is a choice of red or green LEDs with emergency battery operation as a option.

Applications

Krystal exit signs are appropriate in schools, medical facilities, and all commercial facilities where a clean functional style is desired.

Custom


If your project demands a special fixture we would be pleased to discuss the production of custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com

Interior/Exterior Applications

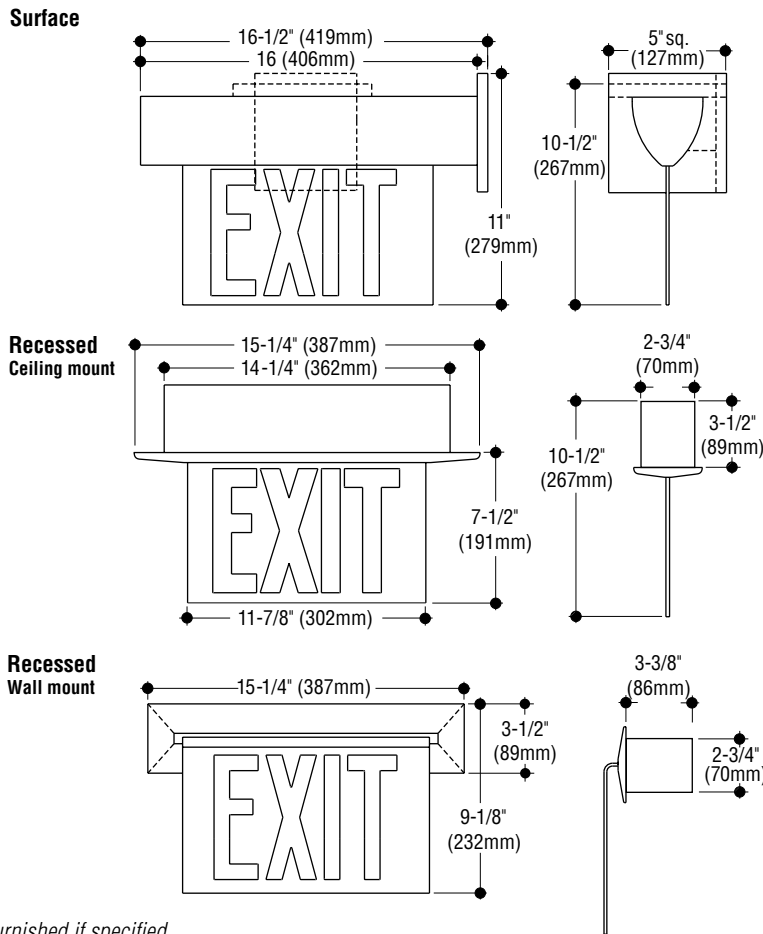

Arrows furnished if specified.

Exits

Krystal Edgelighted Exit Signs

SPECIFICATIONS

Construction

- Cast aluminum trim with concealed hinge, 20 gauge steel housing on recessed models
- Cast aluminum housing on surface models
- Furnished with two 18 gauge steel mounting angles
- Red or green 6" letters are silkscreened on .125" clear acrylic
- Ceiling mounted models have white backing behind acrylic
- Brushed satin finish with clear coating.

Electrical

- Red or green LEDs are dual-circuit and universal voltage
- When emergency battery operation is specified, all components are contained in housing. Nickel cadmium battery, test light and button are included with the -EM option.

Mounting

- Surface signs mount to junction box.
- Recessed housing has holes for mounting.

| Catalog Numbers | Surface | | | | | Recessed | | |
|----------------------------|-------------|----------|----------|-------------|-----------|-------------|-----------|-------------|
| | Single Face | | | Double Face | | Single Face | | Double Face |
| Lamps | Back | Ceiling | End | Ceiling | End | Ceiling | Wall | Ceiling |
| LED .4W (Red), .3W (Green) | KWRL-612 | KCRL-612 | KBRL-612 | KCRLD-612 | KBRLD-612 | KSRL-612 | KWSRL-612 | KSRLD-612 |

Required suffixes

| | | |
|--------------|------|------|
| Letter color | -RED | -GRN |
| Voltage | -120 | -277 |

Options

Directional arrows:

- Arrow left -AL.
- Arrow right -AR.
- Doublehead -A2.
- Left and right (for double face) -A.

Tamperproof screws: Socket head faceplate screws. Add suffix -TP.

Emergency battery operation: Integral circuitry provides 90 minutes of operation. Add suffix -EM.

Pendant mount: Provides canopy and one 18" stem. Use ceiling model number and add suffix -S1.

Custom color: Contact factory for custom preference. Add suffix -CC.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
 2560 Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473
 Fax (626) 443-9253
 info@colelighting.com
www.colelighting.com