

Series	LED	Fluor.	Incan.	Dimming	Exterior	Interior	Feed-Thru	Other Options
159	●		●	●	●	Concrete only	●	Bronze faceplate Faceplate colors LED colors Choice of diffuser

## Steplites

### 159 SERIES

#### Description

The 159 Series of Steplites is an extremely compact, low profile LED and incandescent site fixture ideal for applications such as step risers. Its width allows relatively wide light distribution to the side in a variety of exterior locations. The rugged construction, engineering excellence, and quality make these fixtures ideal for specification in most public areas.

#### Features

Exceptional durability is provided by the thick cast aluminum faceplate and the tempered glass diffuser. The 159 Series features an integral feed-thru junction box.

#### Applications


LED and Incandescent fixtures work extremely well in cold climate conditions. The 159 Series Steplites are suitable for concrete pour/block wall mounting in indoor or outdoor installations. Their low profile makes them ideal for step risers.

#### Custom

If your project demands a special fixture we would be pleased to discuss the production of modified standard fixtures or custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.



L159W

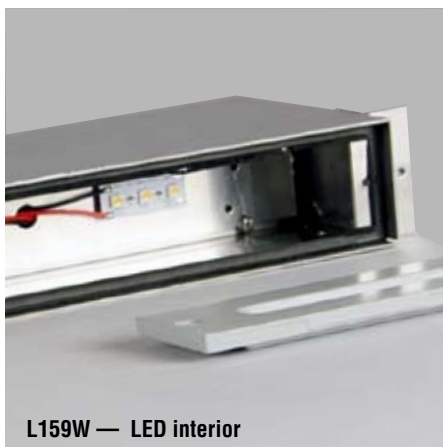

L159W — LED interior



Optional faceplates and finishes available

High performance LEDs or wiring for a 20W T6 $\frac{1}{2}$  incandescent intermediate base lamp are standard with this fixture.



C.W. Cole & Company, Inc.  
2560 N. Rosemead Boulevard  
South El Monte, CA 91733-1593

Tel. (626) 443-2473  
Fax (626) 443-9253  
info@colelighting.com  
[www.colelighting.com](http://www.colelighting.com)

## Steplites

### 159 SERIES

#### SPECIFICATIONS

##### Construction

- Fixture is constructed from die-formed 18 gauge stainless steel
- Faceplate is cast aluminum with metallic aluminum polyester coating, gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass set in silicone sealant
- Reflector is constructed of die-formed white aluminum
- cETLus listed, suitable for wet locations, in concrete pour/block wall construction
- LED suitable for any wall construction.


##### Electrical

- Fixture is wired with high performance LEDs or one 20W T6-1/2 incandescent intermediate base lamp
- LED includes integral universal voltage driver
- One 1/2" conduit knockout provided on each side of housing. Suitable for 4 wire thru-wiring, 2 in 2 out.

##### Mounting

Housing has flange with holes for mounting.

#### LED

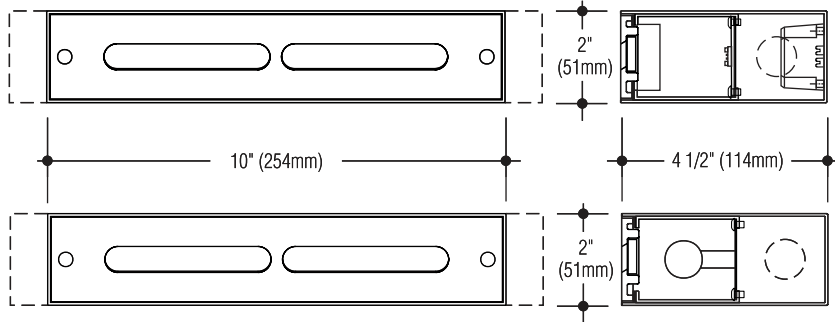

#### Incandescent

#### Catalog Number

#### Lamp

LED 1.5W, (126 lm @ 3000°K)

LED 3.6W, (215 lm @ 3000°K)

One 20W, T6½ intermediate base incandescent

**L159W**

**L159W-HO**

**T159W**

Photometric data available for Steplites can be downloaded at: [www.colelighting.com/downloads/1](http://www.colelighting.com/downloads/1)

#### Options

**Bronze faceplate:** Satin finish, clear coated.

Add suffix **-B**.

**Tamperproof screws:** Socket head faceplate

screws. Add suffix **-TP**.

**Alternate faceplate color:** Black, white or

custom color. Add suffix **-BLK**, **-WHT** or **-CC**

**Opal glass diffuser:** Tempered. Add suffix **-OPL**.

**Dimming:** Universal voltage, 0-10V driver. Add

suffix **-DIM**.

#### LED colors:

4000°K (146 lm), -HO (249 lm). Add suffix **-4K**.

Amber (Not available in -HO). Add suffix **-AMB**.

Blue (Not available in -HO). Add suffix **-BLU**.

#### How to Specify

1. Select catalog number.

2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.  
2560 N. Rosemead Boulevard  
South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

[info@colelighting.com](mailto:info@colelighting.com)

[www.colelighting.com](http://www.colelighting.com)