

Steplites

Series	LED	Fluor.	Incan.	Dimming	Exterior	Interior	Feed-Thru	Other Options
2156	●	●	●	●	●	LED & Fluor. only	●	Faceplate colors LED colors Emergency battery Junction box

2156 SERIES

Description

The 2156 Series of Steplites offers LED, fluorescent or incandescent lamp options. Its width allows excellent light distribution to the sides in a variety of interior or exterior locations. The rugged construction, engineering excellence, and quality make these fixtures ideal for specification in most public areas.

Features

This series is offered in both vertical and horizontal formats and with optional surface mounting. Louvers in the 2156 Series are more widely spaced than in most fixtures of this type, allowing for significantly greater forward projected illumination. Exceptional durability is provided by the thick cast aluminum faceplate and the tempered glass diffuser. Louvered models offer even greater protection to the diffuser while controlling the distribution of the light. Cole Steplites feature a cast aluminum junction box which may be easily field mounted to either the back or bottom of the housing to best suit installation conditions.

Applications

The 2156 Series Steplites are suitable for concrete pour and stud wall mounting in indoor and outdoor installations. LED and incandescent fixtures will work extremely well in cold climates. The LED and fluorescent options are the only fixtures in the series that may be specified for interior combustible conditions. The vertical format is ideal for bollard applications.

Custom

If your project demands a special fixture we would be pleased to discuss the production of modified standard fixtures or custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.



L2156W-J



L2156GW-J



L2156VW-J



SL2156W

2156 Series Steplites are available in louvered or non-louvered faceplates, in vertical or horizontal formats. A cast aluminum surface housing is also offered.



L2156W Interior

The junction box on Cole Steplites may be field mounted to the back or bottom of the fixture.



C.W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com

Steplites

2156 SERIES

SPECIFICATIONS

Construction


- Recessed housing is constructed from die-formed 16 gauge steel electro-galvanized finished with a white polyester coating
- Surface housing and faceplate is cast aluminum with metallic aluminum polyester coating, gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass set in silicone sealant
- Reflector is constructed of die-formed white aluminum
- Optional junction box is cast aluminum with polyester coating
- cETLus listed, suitable for wet locations
- LED and fluorescent models are suitable for any wall construction; Incandescent models are for concrete pour/block wall construction only.

Electrical

- Fixture is wired for high performance LEDs, one or two compact fluorescent lamps, or two incandescent lamps
- Integral drivers and ballasts are universal voltage
- Recessed housing provided with 1/2" conduit knockout on each side, suitable for 4 wire thru-wiring, 2 in 2 out
- Surface housing and optional junction box allow 8 wire thru-wiring, 4 in 4 out. Provided with two 1/2" tapped conduit entrances in the bottom (J-box only) and one 1/2" tapped conduit entrance in each side.

Mounting

Housing has flange with holes for mounting.

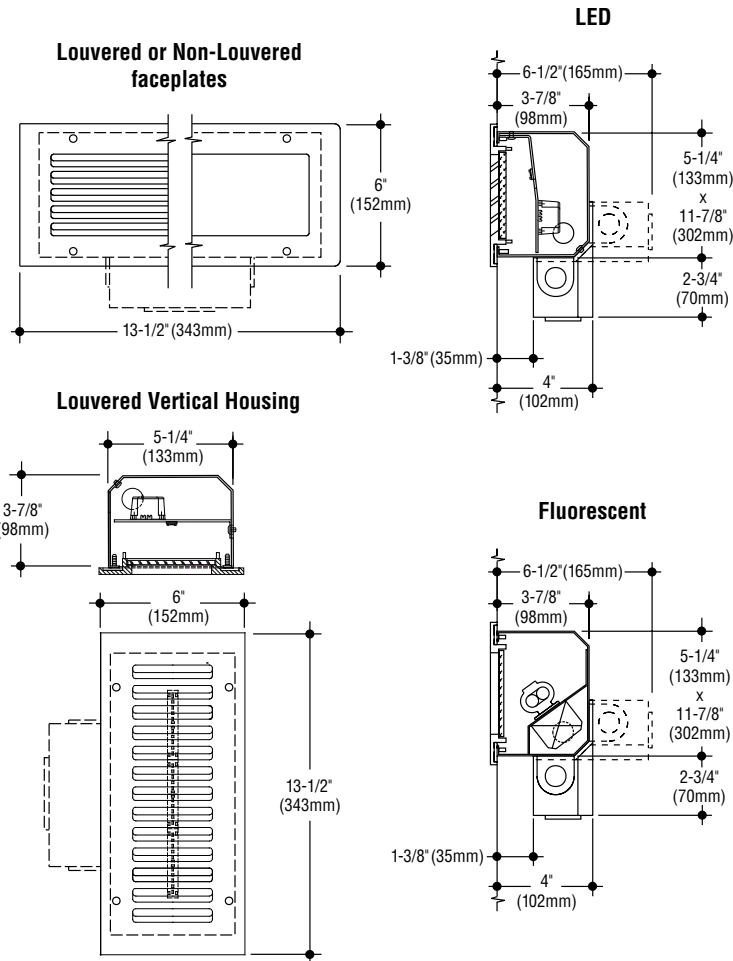

Surface fixture: 13-3/8"W x 6"H x 3-7/8"D

Catalog Numbers	Recessed Fixtures			Surface Fixtures		
	Faceplate			Faceplate		
Lamp	Louver/Hor.	Louver/Vert.	Non-Louver	Louver/Hor.	Louver/Vert.	Non-Louver
LED 4.5W, (377 lm @ 3000°K)	L2156W	L2156VW	L2156GW	SL2156W	SL2156VW	SL2156GW
LED 10.8W, (645 lm @ 3000°K)	L2156W-HO	L2156VW-HO	L2156GW-HO	SL2156W-HO	SL2156VW-HO	SL2156GW-HO
LED 21.6W, (1290 lm @ 3000°K)	L2156W-HO-2	L2156VW-HO-2	L2156GW-HO-2	SL2156W-HO-2	SL2156VW-HO-2	SL2156GW-HO-2
One 13W, (CFT13W/2GX7) compact fluor.	F2156W	F2156VW	F2156GW	SF2156W	SF2156VW	SF2156GW
Two 13W, (CFT13W/2GX7) compact fluor.	F2156W-2	F2156VW-2	F2156GW-2	SF2156W-2	SF2156VW-2	SF2156GW-2
Two 40W, A19 medium base incandescent	T2156W	T2156VW	T2156GW	ST2156W	ST2156VW	ST2156GW

Photometric data available for Steplites can be downloaded at: www.colelighting.com/downloads/1

Options

Junction box: Bottom or back mounted as required for feed-thru. (Not for surface housing)
Add suffix **-J**.

Tamperproof screws: Socket head faceplate screws. Add suffix **-TP**.

Dimming: Universal voltage 0-10V driver. Add suffix **-DIM**.

LED colors: 4000°K (438 lm), -HO (747 lm), -HO-2 (1494 lm). Add suffix **-4K**.

Amber (Not available in HO-2). Add suffix **-AMB**.
Blue (Not available in HO-2). Add suffix **-BLU**.

Voltage: 277V ballast. Add suffix **-277**.

Bronze faceplate: Satin finished, clear coated.
Add suffix **-B**.

Alternate faceplate color: Black or white.
Add suffix **-BLK** or **-WHT**.

Emergency battery: Provides up to 90 minutes operation for both LED and fluorescent models.
Add suffix **-EM**

Opal glass diffuser: Tempered. Add suffix **-OPL**.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com