

Downlites

DL180 SERIES

Description

Cole offers Downlites that provide efficient illumination. The fine satin or polished metal finishes add a premium quality appearance and the opal glass diffuser provides smooth illumination. Fixtures are furnished with stainless steel trims and ceiling pan, which solidly attach to corrosion resistant aluminum housings. Fixtures are suitable for dry ceiling construction. These fixtures are particularly suitable for application in canopy areas, showers, restrooms, stairway landings, and other areas where sleek styling and corrosion resistance carry a special premium.

Features

Stainless steel and aluminum construction provide corrosion resistant durability.

Applications

Downlites are best suited for outdoor canopies, saunas, spas, loading areas, and other exposed locations in schools, sports venues, and industrial facilities.

Custom

If your project demands a special fixture we would be pleased to discuss the production of custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.



Satin Stainless Steel Trim with Opal Glass Diffuser





Polished Stainless Steel Trim with Protective Guard and Frosted Glass Diffuser

COLE
Lighting



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com

LED - Standard

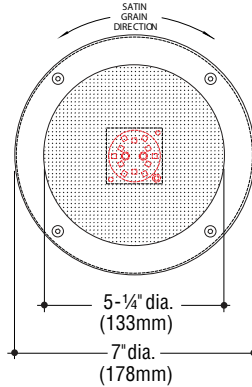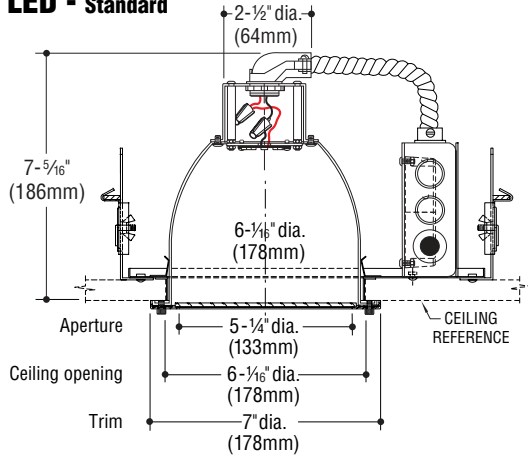

LED - High Output (-HO)

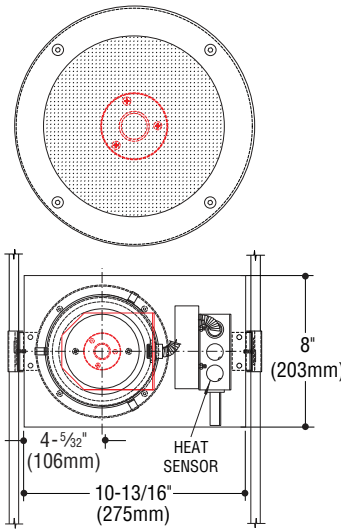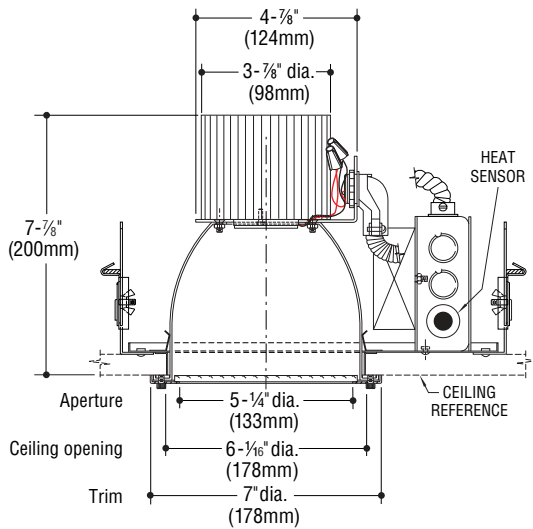

Downlites

DL180 SERIES

SPECIFICATIONS

Construction

- Semi specular reflector housing is spun aluminum
- Trim is spun 18 gauge satin stainless steel, gasketed and retained by four stainless steel tamperproof socket head cap screws
- Optional guard is 1/4" diameter stainless steel
- Shielding is opal glass diffuser.

Electrical

- Intergrated LEDs available in standard and high output
- Driver allows 120 thru 277V input
- cETLus listed for wet locations, when specified
- Suitable IC/non-IC ceiling construction.

Mounting

- Housing has adjustable hangers and two 18" mounting bars.

Catalog Numbers

Lamp	No Guard	With Guard
One 13W LED, (2100 lumens at 3000°K)	DL183	DL181
One 29W LED, (3080 lumens at 3000°K)	DL183-HO	DL181-HO

Lumens shown are source. Photometric data available for Downlites upon request

Options

Alternate finishes: Satin brass with stainless steel guard -**SBR**. Polished stainless steel -**PSS**.

Frosted diffuser: Tempered glass. Add suffix -**FG**.

Weatherproof: IP 55 rated for exterior applications.

Add suffix -**W**.

LED colors:

4000°K (1688 lm). Add suffix -**4K**.

Amber* (FWC compliant, 590 nm). Add suffix -**AMB**.

Emergency battery: Provides up to 90 minutes of operation (Remote only). Add suffix -**EM**.

Dimming: Universal voltage, 0-10V driver.

Add suffix -**DIM**.

Remote power supply: Recommended when used in saunas or spas (Includes damp location enclosure). Add suffix -**REM**.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

* Not available in HO.



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com