#### Interior/Exterior Applications





# KSRLD-612-RED-A-120



## WOMEN SKCRLD-614-GRN-SFT-CPY/WOMEN-120





#### **Exits**

### **Krystal**Edgelighted Exit Signs

#### **SPECIFICATIONS**

#### Description

The Krystal exit signs offers a stylish design suitable for a variety of applications. The aluminum construction is both visually pleasing and possesses corrosion-resistance qualities. The construction is designed so the sign will remain attractive and functionable with minimal maintenance requirements.

#### **Features**

Construction is cast aluminum with a natural satin finish. There is a choice of red or green LEDs with emergency battery operation as a option.

#### **Applications**

Krystal exit signs are appropriate in schools, medical facilities, and all commercial facilities where a clean functional style is desired.

#### Custom

If your project demands a special fixture we would be pleased to discuss the production of custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.




C.W. Cole & Company, Inc. 2560 Rosemead Boulevard South El Monte, CA 91733-1593

Tel. (626) 443-2473 Fax (626) 443-9253 info@colelighting.com www.colelighting.com

#### COLE LIGHTING

#### Interior/Exterior Applications

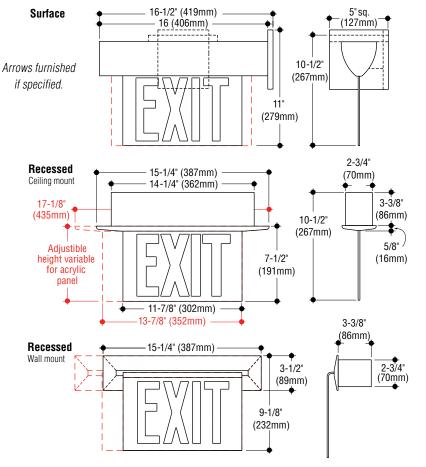

**RECESSED** mount dimensions on the SK614 Series, **SURFACE** sizes differ only on acrylic panel.

#### **Exits**

#### **Krystal**

#### **Edgelighted Exit Signs**

#### **SPECIFICATIONS**

#### Construction

- Cast aluminum trim with concealed hinge, 20 gauge steel housing on recessed models
- Cast aluminum housing on surface models
- Furnished with two 18 gauge steel mounting angles Red or green 6" letters are silkscreened on .188" clear acrylic Ceiling mounted models have white backing behind acrylic Brushed satin finish with clear coating Listed by ETL to UL 924 standard; meets NFPA Life Safety Code 101<sup>®</sup>.

#### **Electrical**

 Red or green LEDs are dual-curcuit and universal voltage
 When emergency battery operation is specified, all components are contained in housing. Nickel cadmium battery, test light and button are included with the -EM option.

#### Mounting

- Surface signs mount to junction box.
- Recessed housing has holes for mounting.

Catalog Numbers	Surface					Recessed		
	Single Face			Double Face		Single Face		Double Face
Lamps	Back	Ceiling	End	Ceiling	End	Ceiling	Wall	Ceiling
LED .4W (Red), .3W (Green)	KWRL-612	KCRL-612	KBRL-612	KCRLD-612	KBRLD-612	KSRL-612	KWSRL-612	KSRLD-612
12 inch wide acrylic SIGN	SKWRL-612	SKCRL-612	SKBRL-612	SKCRLD-612	SKBRLD-612	SKSRL-612	SKWSRL-612	SKSRLD-612
14 inch wide acrylic SIGN	SKWRL-614	SKCRL-614	SKBRL-614	SKCRLD-614	SKBRLD-614	SKSRL-614	SKWSRL-614	SKSRLD-614

Required suffixes: Letter color: Red. -RED. Green. -GRN. Voltage: 120V. -120. 277V. -277

**Copy for SIGN:** Fill in your copy preference. Add suffix **-CPY**/ (your copy here)

#### **Options**

#### **Directional arrows:**

Arrow left -AL.

Arrow right -AR.

Doublehead -A2.

Left and right (for double face) -A.

**Tamperproof screws:** Socket head faceplate

screws. Add suffix -TP.

**Emergency battery operation:** Integral circuitry provides 90 minutes of operation (recessed requires stainless steel trim). Add suffix **-EM**.

Stainless steel trim: Brushed finish (recessed

fixtures only). Add suffix -N.

**Pendant mount:** Provides canopy and one 18" black stem. Use ceiling model number and add suffix **-\$1**.

**Clear (see-thru) panel:** Clear acrylic panel with no backing color. Add suffix **-CLR**.

**Special Font:** Contact factory for custom font preference. Add suffix **-SFT**.

**Custom color:** Fixture housing and mounting bracket alternative color preference.

Add suffix **-CC/** (color)

**Custom font color:** Custom painted font color.

Add suffix -CFC/ (font color)



C.W. Cole & Company, Inc. 2560 Rosemead Boulevard South El Monte, CA 91733-1593

Tel. (626) 443-2473 Fax (626) 443-9253 info@colelighting.com www.colelighting.com