

**JOB NAME** \_\_\_\_\_

**TYPE** \_\_\_\_\_

**CATALOG NUMBER** \_\_\_\_\_

## Steplites 157 SERIES

### SPECIFICATIONS

#### Construction


- Recessed housing is constructed from die-formed 16 gauge electro-galvanized steel and is coated with white polyester
- Surface housing is cast aluminum with metallic aluminum polyester coating
- Faceplate is cast aluminum with metallic aluminum polyester coating, gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass, set in silicone sealant
- Optional junction box is cast aluminum with polyester coating
- cETLus listed, suitable for wet locations in any wall construction
- Suitable for any wall construction
- All models suitable for wet locations.

#### Electrical

- Fixture is wired with high performance LED modules, or one E26 medium base lamp socket
- Integral driver is standard universal voltage; optional 0-10V dimming driver available
- Standard recessed and surface housing allows for 4 thru-wiring, 2 in and 2 out
- Housing provided with 1/2" conduit knockout on each side suitable for 4 wire thru-wiring, 2 in and 2 out
- Optional junction box allows 8 wire thru-wiring, 4 in and 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" tapped conduit entrance in each side.

#### Mounting

Housing has flange with holes for mounting.

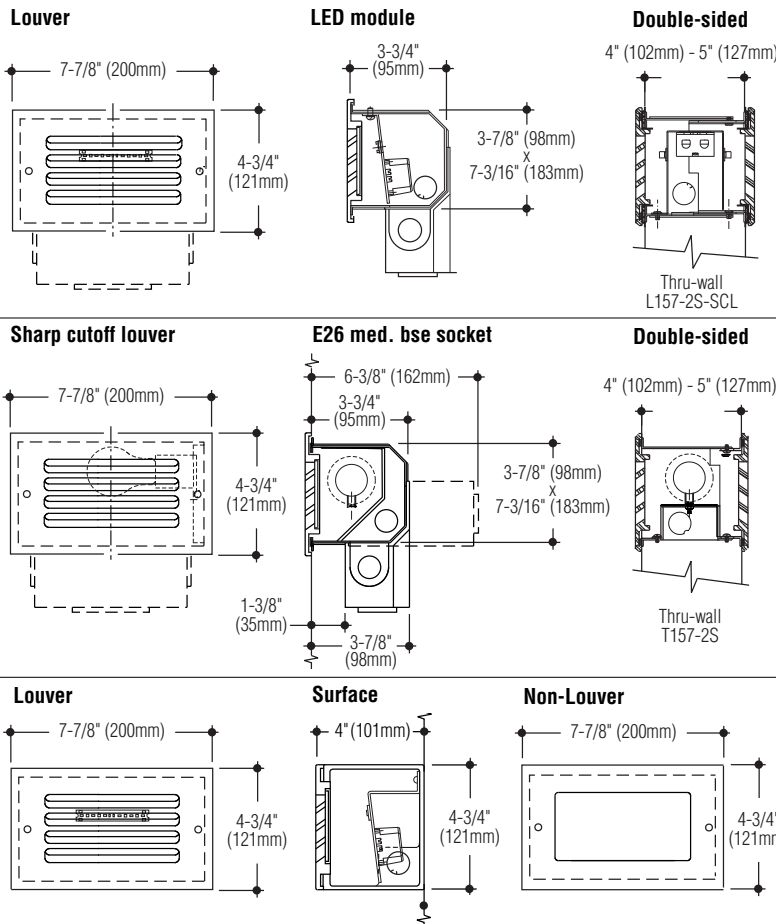

Catalog Numbers	Recessed Fixtures		Thru-Wall		Surface Fixtures	
	Faceplate		Faceplates		Faceplate	
	Louver	Non-Louver	Louver	Non-Louver	Louver	Non-Louver
Lamp						
LED 1.5W, (126 lm @ 3000°K)*	<input type="checkbox"/> L157W	<input type="checkbox"/> L157GW	<input type="checkbox"/> L157W-2S	<input type="checkbox"/> L157GW-2S	<input type="checkbox"/> SL157W	<input type="checkbox"/> SL157GW
LED 3.4W, (331lm @ 3000°K)*	<input type="checkbox"/> L157W-HO	<input type="checkbox"/> L157GW-HO	<input type="checkbox"/> L157W-2S-HO	<input type="checkbox"/> L157GW-2S-HO	<input type="checkbox"/> SL157W-HO	<input type="checkbox"/> SL157GW-HO
LED 6.8W, (662 lm @ 3000°K)*	<input type="checkbox"/> L157W-HO-2	<input type="checkbox"/> L157GW-HO-2	—	—	<input type="checkbox"/> SL157W-HO-2	<input type="checkbox"/> SL157GW-HO-2
One E26 medium base lamp	<input type="checkbox"/> T157W	<input type="checkbox"/> T157GW	<input type="checkbox"/> T157W-2S	<input type="checkbox"/> T157GW-2S	<input type="checkbox"/> ST157W	<input type="checkbox"/> ST157GW

Lumens shown are source. \*Indicated values for wattage and lumens doubled for thru-wall models.

Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

### Options

**Junction box:** Bottom or back mounted junction box for feed-thru. Add suffix  -J (Not available with surface or thru-wall models).

**Sharp cutoff louver:** Below horizontal illumination. Add suffix  -SCL.

**Cast Bronze faceplate and surface housing:** Satin finish, clear coated. Add suffix  -B.

**Stainless Steel housing:** 16 gauge stainless steel recessed housing. Add suffix  -SS.

**Alternate faceplate color:** Black, white or custom color. Add suffix  -BLK,  -WHT or  -CC.

**Opal glass diffuser:** Tempered. Add suffix  -OPL.

**Tamperproof screws:** Socket head faceplate screws. Add suffix  -TP.

**Dimming:** Universal voltage, 0-10V driver. Add suffix  -DIM.

**Emergency battery (4 Watt):** Provides up to 90 minutes operation. Add suffix  -EM.

**LED colors:**  
**4100°K** (146 lm), -HO (384 lm), -HO-2 (768 lm). Add suffix. Add suffix  -4K.  
**Amber\*** (FWC compliant, 590 nm). Add suffix  -AMB.  
**Blue\*** Add suffix  -BLU.

\*Not available in HO or HO-2

#### How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



**C.W. Cole & Company, Inc.**  
 2560 Rosemead Boulevard  
 South El Monte, CA 91733-1593

Tel. (626) 443-2473  
 Fax (626) 443-9253  
[info@colelighting.com](mailto:info@colelighting.com)  
[www.colelighting.com](http://www.colelighting.com)