


JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Steplites L2159 SERIES L2159D SERIES DIRECTIONAL

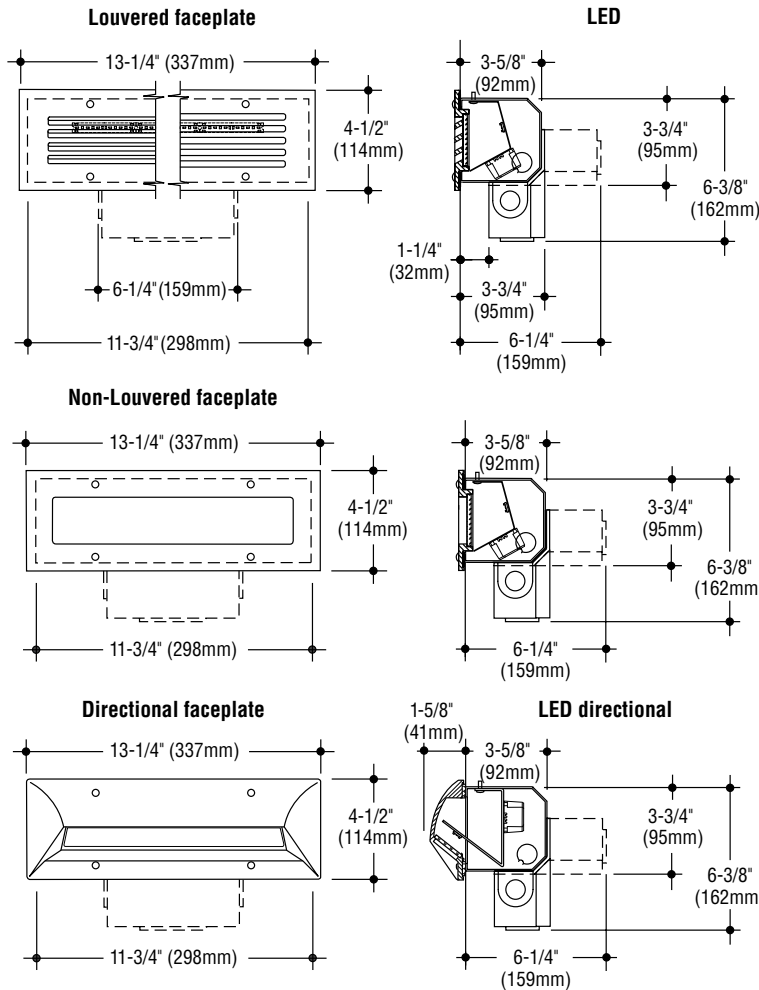

SPECIFICATIONS

Construction

- Fixture housing is constructed from die-formed 16 gauge electro-galvanized steel finished with a white polyester
- Faceplate is cast aluminum, with metallic aluminum powder coating, gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass on louvered and non-louvered models, and vertically-ribbed tempered spread lens on Directional models. Each is set in silicone sealant
- Optional junction box is cast aluminum with polyester coating
- cETLus listed, suitable for wet locations in any IC, non-IC and concrete/pour wall construction.

Electrical

- Fixture is wired with high performance LEDs and are available in a variety of colors
- Integral driver is standard universal voltage; optional 0-10v dimming driver available
- Recessed housing provided with 1/2" conduit knockout on each side, suitable for 4 wire thru-wiring, 2 in 2 out
- Optional junction box allows 8 wire thru-wiring, 4 in 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" conduit entrance in each side of housing.

Mounting

Housing has flanges with holes for mounting.

Catalog Numbers

Lamps

LED 4.5W, (377 lm @ 3000°K)
LED 9.4W, (993 lm @ 3000°K)
LED 18.8W, (1986 lm @ 3000°K)

Faceplate

Louwer

L2159W
 L2159W-HO
 L2159W-HO-2

Non-Louwer

L2159GW
 L2159GW-HO
 L2159GW-HO-2

Directional

L2159DW
 L2159DW-HO
 L2159DW-HO-2

Lumens shown are source. Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

Options

- Sharp cutoff louver:** Below horizontal illumination. Add suffix -SCL.
- Cast Bronze faceplate:** Satin finished, clear coated. Add suffix -B.
- Opal glass diffuser:** Tempered (Not available on directional models). Add suffix -OPL.
- Tamperproof screws:** Socket head faceplate screws. Add suffix -TP.
- Alternate faceplate color:** Black, White or custom color. Add suffix -BLK, -WHT or -CC (Contact factory for custom preference).
- Voltage:** 277V. Add suffix -277.

LED colors:

- 4000°K** (438lm), -HO (1152lm) Add suffix -4K.
- Amber** (FWC compliant, 590 nm). Add suffix -AMB.
- Blue** Add suffix -BLU.
- Emergency battery (4 Watt):** Provides up to 90 minutes operation. Add suffix -EM.
- Dimming:** Universal voltage 0-10V driver. Add suffix -DIM.
- Junction box:** Bottom or back mounted as required for feed-thru. Add suffix -J.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com