


**JOB NAME** \_\_\_\_\_

**TYPE** \_\_\_\_\_


**CATALOG NUMBER** \_\_\_\_\_

**Steplites**

*FannyPack* **XL**  
**L2600 SERIES**

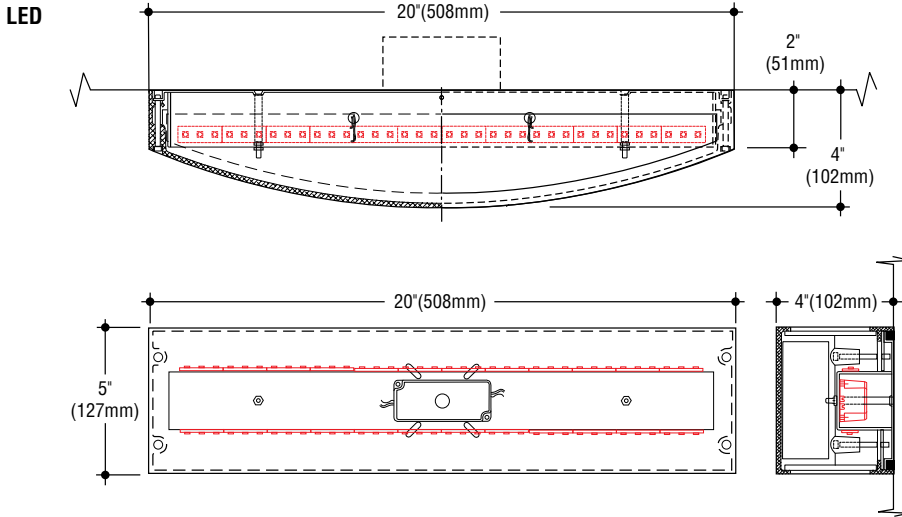

**Optional Surface Collar**

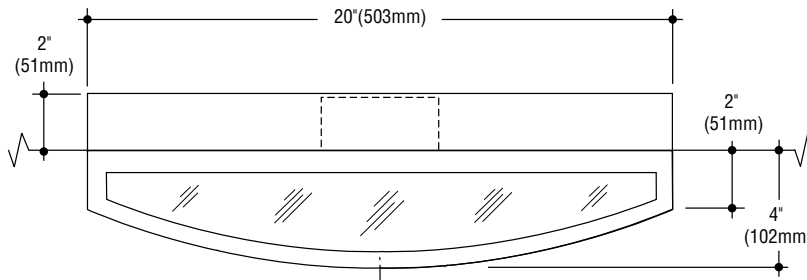

**SPECIFICATIONS**

**Construction**

- ADA-compliant housing is cast aluminum with a 16 gauge stainless steel back mounting plate. Optional surface collar is .063" aluminum
- Finish is textured black polyester. Other finishes are available
- Trim is fastened in place by stainless steel mounting screws
- Fixture offers choices of frosted, ribbed spread, and prismatic lenses, each set in silicone sealant. Illumination can be directed up, down, or both
- cETLus listed for use in wet locations on any wall construction.

**Electrical**

- Standard and high output LEDs are available in a variety of colors
- Intergral drivers is standard universal voltage; optional 0-10V dimming driver available.

**Mounting**

- Stainless steel wall plate and surface collar includes universal mounting pattern with center feed entry.

**Catalog Number**

**Lamp**

LED 9.0W, 755lm @ 3000°K per diffuser

LED 18.6W, 1985lm @ 3000°K per diffuser

**One diffuser**

**L2600W-1-(diffuser)**

**L2600W-1-HO-(diffuser)**

**Two diffusers**

**L2600W-2-(top diffuser/bottom diffuser)**

**L2600W-2-HO (top diffuser/bottom diffuser)**

Lumens shown are source. Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

**Options**

**Alternate finishes:** Metallic aluminum or textured white. Add suffix  **-ALU** or  **-WHT**.

**Diffusers:** Select one or two diffuser choices.

If same diffuser selected for two-diffuser models, state selection twice. (Example: L2600W-2-ST/ST)

Add suffixes as required.

- Frosted tempered glass  **-FG**
- Ribbed glass spread lens  **-ST**
- Prismatic tempered glass  **-C73**
- Perforated panel/glass  **-PF**
- Opal glass diffuser  **-OPL**

**Surface collar:** Allows surface emergency battery/driver location and/or surface conduit capability.

Adds 2" (no longer complies with ADA) to overall fixture depth. Add suffix  **-SC**.

**Emergency battery:** Provides 90 minutes operation. Requires recessed housing (std.) or surface collar (Add -SC). Add suffix  **-EM**

**LED colors:** 4000°K (876 lm, per diffuser), -HO (2304 lm, per diffuser). Add suffix  **-4K**. Amber (FWC compliant, 560 nm).

Add suffix  **-AMB**.

Blue. Add suffix  **-BLU**.

**Dimming:** Universal voltage 0-10V driver.

Add suffix  **-DIM**.

**How to Specify**

1. Select catalog number.
2. Add suffixes for options required to meet job conditions.



**C.W. Cole & Company, Inc.**  
2560 Rosemead Boulevard  
South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

[www.colelighting.com](http://www.colelighting.com)