

JOB NAME _____

Type _____

CATALOG NUMBER _____

Plugging Boxes

TLS350 SERIES Recessed Stage Pockets

Specifications

Construction

- Cover is black cast iron with non-skid tread design and cord-clearance slots (except TLS351-W)
- 16 gauge steel housing
- Housing is white polyester powder coated
- TLS351-W satin finished cast aluminum cover substitutes for standard cover on TLS351
- TLS351-W has neoprene gasket and is suitable for wet locations (not recommended for areas subject to submersion)

Electrical


- Various combinations of wiring devices are available, including both low and high voltage
- Depending on model chosen, one to four electrical compartments are provided offering low and high voltage separation
- Recessed housing has eight 1/2", 3/4", 1" combination conduit knockouts
- cETLus listed electrical Metallic Outlet Box; TLS351-W listed for use in wet locations (not for submersion)

Mounting

- Two removable angles furnished for mounting to any side
- Suitable for mounting in wood or concrete floors
- Grout is required to seal cover with finished floor
- Throw-away pan included for casting into poured concrete to provide clearance for cover.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.
3. For higher-rated outlets, specify required amperage.

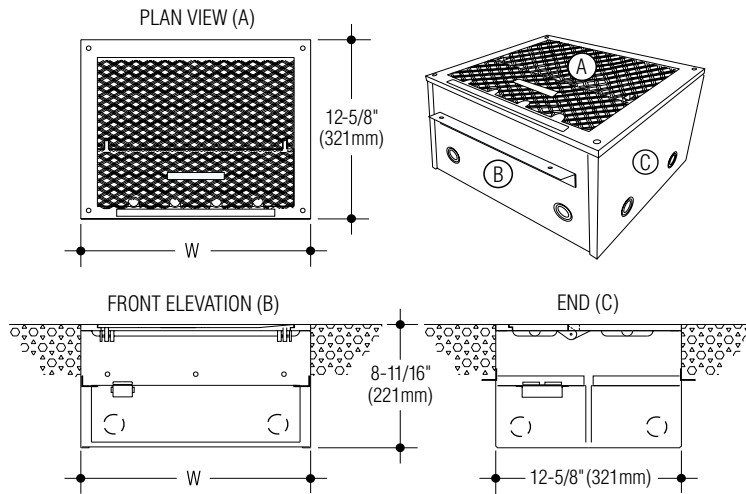

Catalog Number		Outlets		
Blank interior plate. No device Furnished	WIDTH (W)	DEVICE MOUNTING AREA	Number of device cord slots	DEVICE SPACE AVAILABLE
<input type="checkbox"/> TLS351	7"	4"W x 9 1/2"	1	2
<input type="checkbox"/> TLS352	9 3/4"	9 1/2"W x 6"	2	10
<input type="checkbox"/> TLS353	12 5/8"	9 1/2"W x 6"	3	10
<input type="checkbox"/> TLS354	15 5/8"	12"W x 6"	4	14

Options

Cast Iron Cover:

TLS351-W only. Powder coated black. Add suffix -FE.

Weather resistant Cast Aluminum Cover:

TLS351 only. No cord slot. Device mounting area is 4"W x 9 1/2". Add suffix -W.

Concrete Mount: Add suffix -C.

Extra conduit holes: Added to housing. Add suffix -KO.

Device Options

Duplex Receptacle: Dual plug receptacle. Add suffix -DUP

Ground Fault Circuit Interrupter: Weather resistant/tamper resistant receptacle. Add suffix -GFCI

GFCI/Weather Resistant/Temperproof: Applies to the TLS351-W. Add suffix -GFCI/WR/TR

Duplex/Cable Receptacle: Combo dual plug and USB ports. Add suffix -DUP/USB

Phone/Ethernet: Phone or data connection in Decora® cutout. Add suffix -RJ11 or -RJ45

Standard cable connection interface: Universal Serial Bus port. Add suffix -USB

Audio/video interface: High-definition multimedia interface. Add suffix -HDMI

Microphone connector: XLR 3-pole, jack, panel mount. Add suffix -MIC

Speaker connector: XLR 4-pole, jack, panel mount. Add suffix -SPKR

Customer specific: Specify device or desired provisions. Add suffix -9/_____ (device or provisions)

TLS350 Series Device Capacity Chart

-DUP duplex	-GFCI duplex w. circuit breaker	-DUP /USB duplex w. USB ports	-RJ11 1-6 jacks per insert	-RJ45 1-6 jacks per insert	-USB 1-6 ports per insert	-HDMI 1-6 ports per insert	-SPKR single	-MIC single
Maximum inserts per housing = varies per fixture							= 4 thru 14	
Mixed and matched quantities not to exceed total in any column.								



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com