


JOB NAME _____

Type _____


CATALOG NUMBER _____

Steplites


L500 SERIES

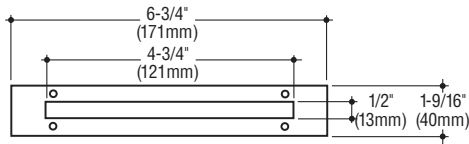


L503W

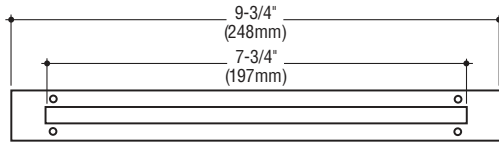


L506W

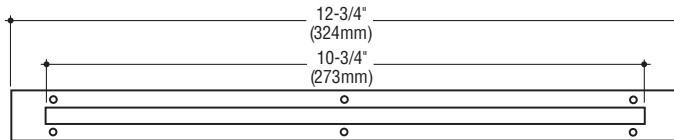

L509W

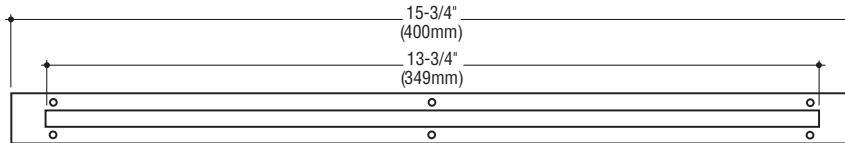

L512W



Housing widths:

L503W = 6-3/32" (155mm)

L506W = 9-3/32" (231mm)

L509W = 12-3/32" (307mm)

L512W = 15-3/32" (383mm)

SPECIFICATIONS

Construction

- Housing is 16 gauge stainless steel
- Faceplate is 3/16" satin finished stainless steel passivated for maximum rust resistance
- Fixtures are furnished with stainless steel socket head tamperproof screws
- Diffuser is frosted tempered glass set in silicone sealant
- cETLus listed for wet locations in any wall construction
- All models suitable for concrete pour.

Electrical

- Fixture is wired with high high output LEDs are available in a variety of colors
- Integral driver is standard universal voltage; optional 0-10v dimming driver available
- Housing provided with 1/2" conduit knockout on each side suitable for 4 wire thru-wiring, 2 in and 2 out.

Mounting

Housing has flange with holes for mounting.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

Catalog Number

Lamp

- | | |
|-----------------------------|---------------------------------------|
| LED 1.5W, (126 lm @ 3000°K) | <input type="checkbox"/> L503W |
| LED 3.0W, (252 lm @ 3000°K) | <input type="checkbox"/> L506W |
| LED 4.5W, (377 lm @ 3000°K) | <input type="checkbox"/> L509W |
| LED 6.0W, (503 lm @ 3000°K) | <input type="checkbox"/> L512W |

Lumens shown are source.

Photometric data available for Steplites can be downloaded at: <https://www.colelighting.com/photometrics>

Options

Bronze faceplate: Satin finished, clear coated.

Add suffix **-B**.

Opal glass diffuser: Tempered. Add suffix **-OPL**.

LED colors:

4000°K (L503, 146 lm), (L506, 292 lm), (L509, 438 lm), (L512, 584 lm). Add suffix **-4K**.

Amber. Add suffix **-AMB**.

Blue. Add suffix **-BLU**.

Dimming: 0-10V dimming driver Universal Voltage.

Add suffix **-DIM**.

Emergency battery (4 Watt): Provides up to 90 minutes operation. Add suffix **-EM**.

How to Specify

1. Select catalog number with desired features.

2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
 2560 Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473
 Fax (626) 443-9253
 info@colelighting.com
www.colelighting.com