

**JOB NAME** 

## **CATALOG NUMBER**

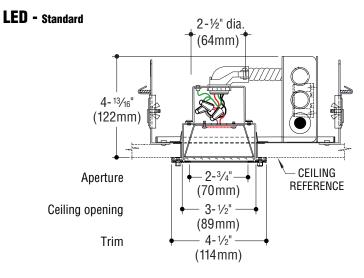

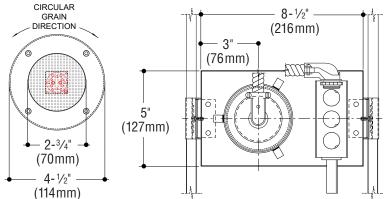

Catalog Numbers		
Lamps	No Guard	With Guard
One 13W LED, (2100 lumens at 3000°K)	☐ DL183	☐ DL181
Lumens shown are source. Photometric data available for S	tenlites upon request	

#### **Options**

#### Alternate finishes:

Satin brass with stainless steel guard — -SBR.

Polished stainless steel -- -PSS.

Frosted glass diffuser: Tempered. Add suffix -OPL.

LED colors:

4000°K (1688 lm).Add suffix 🗌 **-4K**.

Amber (FWC compliant, 590 ni Add suffix -AMB.

Amber (FWC compliant, 590 nm).

Weatherproof: IP 65 rated for exterior

applications. Add suffix  $\square$  -W.

Emergency battery: Provides up to 90 minutes of operation (Remote only). Add suffix — -EM.

**Dimming:** Universal voltage, 0-10V driver.

Add suffix . -DIM.

**Remote power supply:** Recommended when used in saunas or spas (Includes damp location

enclosure). Add suffix  $\square$  -REM.

TYPE

# **Downlites**

# **DL280 SERIES**

#### **SPECIFICATIONS**

#### Construction

• Semi specular reflector housing is spun aluminum • Trim is spun 18 gauge satin stainless steel, gasketed and retained by four stainless steel tamperproof socket head cap screws • Optional guard is 3/16" diameter stainless steel • Shielding is opal glass

#### Electrical

- Integrated LEDs are high output Integral driver allows 120 thru 277V input • cETLus listed for wet locations, when specified
- Suitable IC/non-IC ceiling construction

#### Mounting

Housing has adjustable hangers and two 18" mounting bars.

## **How to Specify**

- 1. Select catalog number with desired features.
- 2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc. 2560 Rosemead Boulevard South El Monte, CA 91733-1593

Tel. (626) 443-2473 Fax (626) 443-9253 info@colelighting.com www.colelighting.com