


JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Interior/Exterior Applications

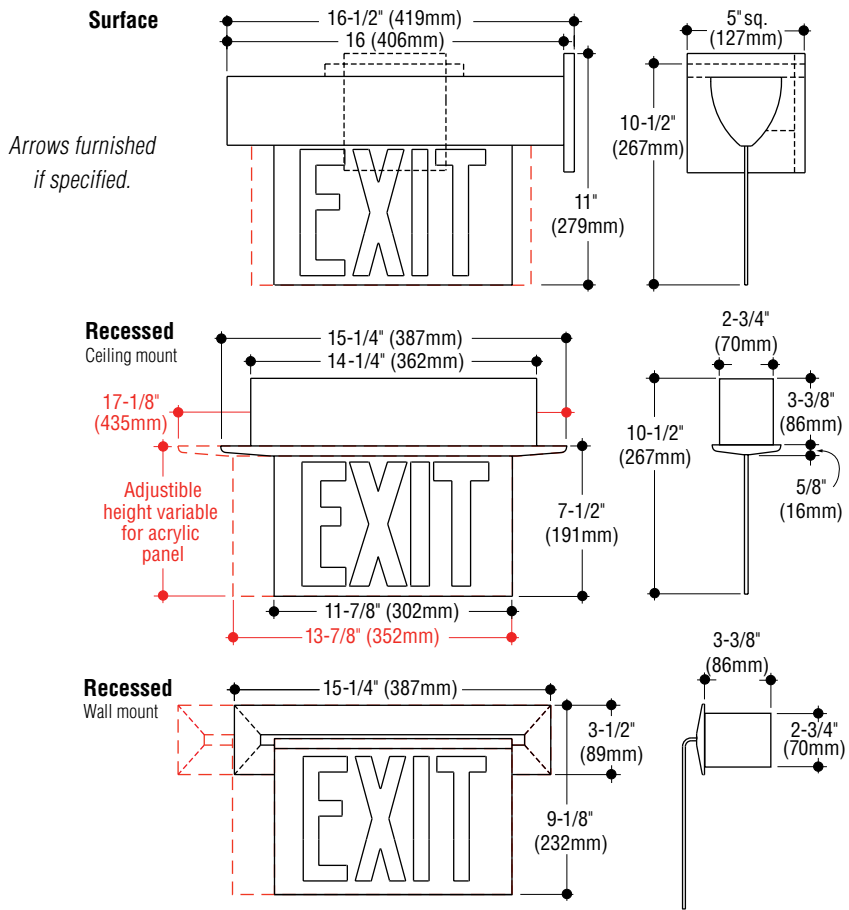

Exits

Krystal

Edgelighted Exit Signs

SPECIFICATIONS

Construction

- Cast aluminum trim with concealed hinge, 20 gauge steel housing on recessed models
- Cast aluminum housing on surface models
- Furnished with two 18 gauge steel mounting angles
- Red or green 6" letters are silkscreened on .188" clear acrylic
- Ceiling mounted models have white backing behind acrylic
- Brushed satin finish with clear coating
- Listed by ETL to UL 924 standard; meets NFPA Life Safety Code 101®.

Electrical

- Red or green LEDs are dual-circuit and universal voltage
- When emergency battery operation is specified, all components are contained in housing. Nickel cadmium battery, test light and button are included with the -EM option.

Mounting

- Surface signs mount to junction box.
- Recessed housing has holes for mounting.

RECESSED mount dimensions on the SK614 Series, **SURFACE** sizes differ only on acrylic panel.

Catalog Numbers	Surface					Recessed		
	Single Face		Double Face			Single Face		Double Face
	Back	Ceiling	End	Ceiling	End	Ceiling	Recessed Wall	Ceiling
.4W (Red), .3W (Green)	<input type="checkbox"/> KWRL-612	<input type="checkbox"/> KCRL-612	<input type="checkbox"/> KBRL-612	<input type="checkbox"/> KCRLD-612	<input type="checkbox"/> KBRLD-612	<input type="checkbox"/> KSRL-612	<input type="checkbox"/> KWSRL-612	<input type="checkbox"/> KSRLD-612
12" wide acrylic SIGN	<input type="checkbox"/> SKWRL-612	<input type="checkbox"/> SKCRL-612	<input type="checkbox"/> SKBRL-612	<input type="checkbox"/> SKCRLD-612	<input type="checkbox"/> SKBRLD-612	<input type="checkbox"/> SKSRL-612	<input type="checkbox"/> SKWSRL-612	<input type="checkbox"/> SKSRLD-612
14" wide acrylic SIGN	<input type="checkbox"/> SKWRL-614	<input type="checkbox"/> SKCRL-614	<input type="checkbox"/> SKBRL-614	<input type="checkbox"/> SKCRLD-614	<input type="checkbox"/> SKBRLD-614	<input type="checkbox"/> SKSRL-614	<input type="checkbox"/> SKWSRL-614	<input type="checkbox"/> SKSRLD-614
Required suffixes:	Letter color: Red. <input type="checkbox"/> -RED. Green. <input type="checkbox"/> -GRN.		Voltage: 120V. <input type="checkbox"/> -120. 277V. <input type="checkbox"/> -277					
	Copy for SIGN: Fill in your copy preference. Add suffix <input type="checkbox"/> -CPY/_____.							

OPTIONS

Directional arrows:

- Arrow left -AL.
- Arrow right -AR.
- Doublehead -A2.
- Left and right (for double face) -A.

Tamperproof screws: Socket head faceplate screws. Add suffix -TP.

Emergency battery operation: Integral circuitry provides 90 minutes of operation (recessed requires stainless steel trim). Add suffix -EM.

Stainless steel trim: Brushed finish (recessed fixtures only). Add suffix -N.

Pendant mount: Provides a black canopy and an 18" stem. Use ceiling model number and add suffix -S1.

Clear (see-thru) panel: Clear acrylic panel with no backing color. Add suffix -CLR.

Special Font: Contact factory for custom font preference. Add suffix -SFT.

Custom color: Fixture housing and mounting bracket alternative color preference. Add suffix -CC/_____.

Custom font color: Custom painted font color. Add suffix -CFC/_____.



C.W. Cole & Company, Inc.
 2560 Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473
 Fax (626) 443-9253
 info@colelighting.com
www.colelighting.com