
# **JOB NAME**

# **CATALOG NUMBER**

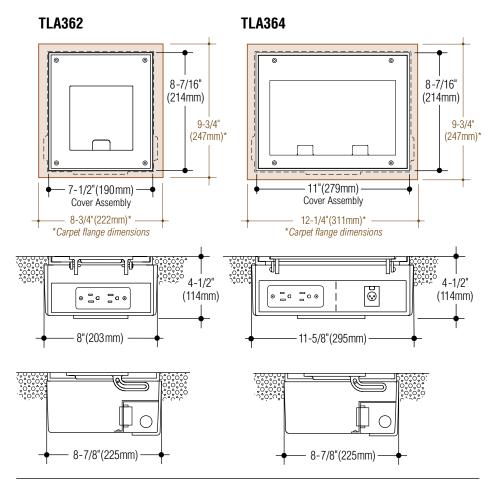

## **Catalog Numbers**

Installed Devices Suf	fix
Cast aluminum, non-skid tread design 11" x 8-1/2". Blank interior plate.	TLA364
Cast aluminum, non-skid tread design 7-1/2" x 8-1/2". Blank interior plate.	TLA362

Installed Devices	Suffix
Duplex Receptacle: 15 amp capacity.	DUP
<b>Ground Fault Circuit Interrupter:</b> Weather and tamper resistant receptacle.	-GFCI
$\textbf{Phone/Ethernet:} \ \ \textbf{Telephone} \ \ \textbf{or} \ \ \textbf{data} \ \ \textbf{connection} \ \ \textbf{in} \ \ \textbf{modular} \ \ \textbf{Decora}^{\textcircled{\texttt{e}}} \ \ \textbf{cutout}.$	RJ11 orRJ45
Standard cable connection interface: Universal Serial Bus port.	USB
Audio/video interface: High-definition multimedia interface.	-HDMI
Microphone connector: XLR 3-pole, jack, panel mount.	-MIC
Speaker connector: XLR 4-pole, jack, panel mount.	-SPKR
<b>Customer specific:</b> Specify device or desired provisions.	9/
	(device or provisions)

o			

D24

Cast Bronze Cover: Satin clear coated, non-skid

tread is standard. Add suffix — -B.

Finish Trim: Brushed satin finish, clear coated.

Add suffix -FT.

Carpet Flange: Finish trim included. Add suffix  $\square$  -CF.

<b>Dust Cover:</b> Outlet covers. Add suffix — <b>-D</b> .
Cast Iron Housing. Add suffix -FE.
Conduit holes: Special or additional tapped
holes in housing. Add suffix $\square$ <b>-KO</b> .
Custom color: Contact factory.

Add suffix -CC.

TYPE

# Plugging Boxes TLA362/TLA364

#### **Specifications**

SERIES

#### Construction

Cast aluminum housing, door, frame and leveling collar are black polyester coated or finished in a brushed/satin • Optional brushed/satin finish, cast aluminum carpet flange overlaps housing to cover and protect edges of carpet • Device mounting plate is .063" aluminum • 20 gauge electro-galvanized steel concrete "throw-away" cover provided to keep debris out of housing during concrete pour

## **Electrical**

Factory installed wiring devices are available as illustrated • TLA364 models, with multiple voltage devices, have metal interior barrier between compartments • Recessed housings have two tapped 1/2" conduit entries, one on each voltage compartment • cETLus listed electrical Metallic Outlet Box

#### Mountina

Boxes designed for poured concrete floors. Frame, with leveling screws, is adjustable and is designed for dry-pack grout after cover is leveled to finished floor.

#### **How to Specify**

- 1. Select catalog number with desired features.
- 2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc. 2560 Rosemead Boulevard South El Monte, CA 91733-1593

Tel. (626) 443-2473 Fax (626) 443-9253 info@colelighting.com www.colelighting.com