


**JOB NAME** \_\_\_\_\_

**TYPE** \_\_\_\_\_

**CATALOG NUMBER** \_\_\_\_\_

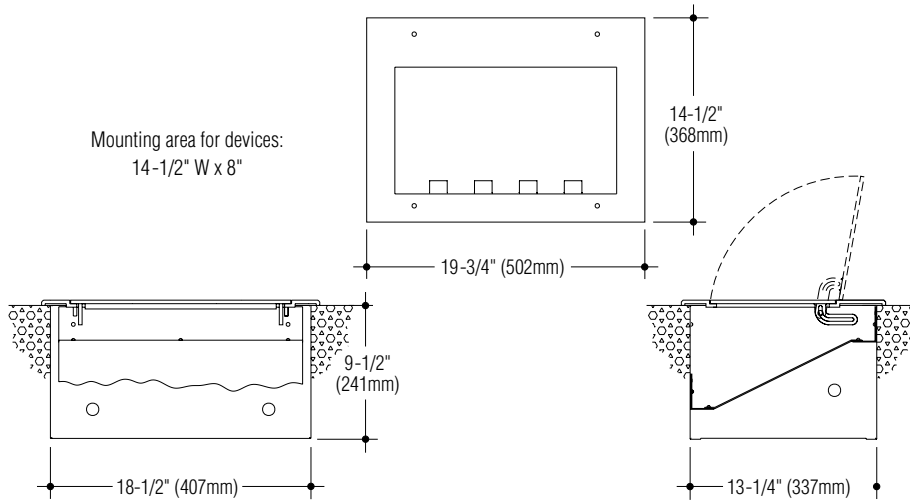

## Plugging Boxes TLS370 SERIES

### Specifications

#### Construction

- Cast aluminum door and frame are brushed/satin finished, clear-coated and available with four open cord-slots or optional oversized cord-slot with hinged cover
- 16 gauge electro-galvanized steel housing is white polyester coated, suitable for concrete pour installation
- Cover-set available with choices of flush-fit or overlapping carpet flange
- Four cord slots allow cords to pass with door in closed position
- Device mounting plate is .063" aluminum

#### Electrical

- Specified assortment of wiring devices can be factory or customer supplied and installed onto receptacle plates
- Recessed housing has four 1/2", 3/4", 1" combination conduit knockouts; additional knockouts available
- Metal voltage barriers can be supplied, as required, to separate low and high voltage devices
- cETLus listed electrical Metallic Outlet Box

#### Mounting

- Housing is suitable for concrete pour or wood floor installation
- Flanges are provided on the sides

#### How to Specify

1. Select catalog number with option suffix(es).
2. Specify electrical devices if factory installation is desired.
3. Indicate special conduit feed locations if required.

### Catalog Numbers

TLS370

### Options

**Cast Bronze:** Frame and door are satin finished cast red brass. Add suffix  -B.

**Flush Frame:** Provides flangeless frame for non-carpeted floors; includes concrete cover for proper installation. Add suffix  -FF.

**Carpet Stops:** Provides 1/4" vertical flange around perimeter of frame and cover for application of carpet directly on top of unit. Add suffix  -CS.

**Single Cord Slot:** Provides single 4" wide cord slot with hinged door. Add suffix  -1S.

**Separation Barrier:** Provides barrier below device mounting panel to allow different voltage devices to be used. Add suffix  -SB.

**Installed Devices:** Specify required electrical devices for factory installation. Add suffix  -9.

### Device Options

**Duplex Receptacle:** Dual plug receptacle. Add suffix  -DUP

**Ground Fault Circuit Interrupter:** Weather resistant/tamper resistant receptacle. Add suffix  -GFCI

**Duplex/Cable Receptacle:** Combo dual plug and USB ports. Add suffix  -DUP/USB

**Standard cable connection interface:** Universal Serial Bus port. Add suffix  -USB

**Audio/video interface:** High-definition multimedia interface. Add suffix  -HDMI

**Microphone connector:** XLR 3-pole, jack, panel mount. Add suffix  -MIC

**Speaker connector:** XLR 4-pole, jack, panel mount. Add suffix -SPKR

**Phone/Ethernet:** Telephone/data connection in modular Decora® cutout. Add suffix  -RJ11 or  -RJ45

**Customer specific:** Specify device or desired provisions. Add suffix  -9/(device or provisions)

### TLS370 Series Device Capacity Chart

<b>-DUP</b> duplex	<b>-GFCI</b> duplex w. circuit breaker	<b>-DUP /USB</b> duplex w. USB ports	<b>-RJ11</b> 1-6 jacks per insert	<b>-RJ45</b> 1-6 jacks per insert	<b>-USB</b> 1-6 ports per insert	<b>-HDMI</b> 1-6 ports per insert	<b>-SPKR</b> single	<b>-MIC</b> single
<b>Maximum inserts per housing = 14</b>							<b>= 28</b>	
Mixed and matched quantities not to exceed total in any column.								



**C.W. Cole & Company, Inc.**  
2560 Rosemead Boulevard  
South El Monte, CA 91733-1593

**Tel.** (626) 443-2473  
**Fax** (626) 443-9253  
info@colelighting.com  
[www.colelighting.com](http://www.colelighting.com)