

JOB NAME _____

Type _____

CATALOG NUMBER _____

Steplites

**C1392 SERIES
Railite**

SPECIFICATIONS

Construction

• Housing is constructed from 20 gauge stainless steel or .050" aluminum • Satin finish with passivation on exterior stainless steel surfaces or powder coat on aluminum surfaces • Diffuser is 3/16" opal acrylic • Tamperproof screws provided • cETLus listed for use in wet locations, in any wall construction • Intended for mounting between pairs of vertical support posts via field-drilled mounting holes. Other mounting methods are available on request.

Electrical


• Fixture is wired for high performance LEDs or compact fluorescent • Driver is universal voltage • Ballast is standard 0°F electronic 120V (277V optional) • Provided with 1/2" knockout on either side.

Mounting

Intended for mounting between pairs of vertical support posts via field-drilled mounting holes. Other mounting methods are available on request.

How to Specify

Select catalog number and add suffix(s) for desired options.

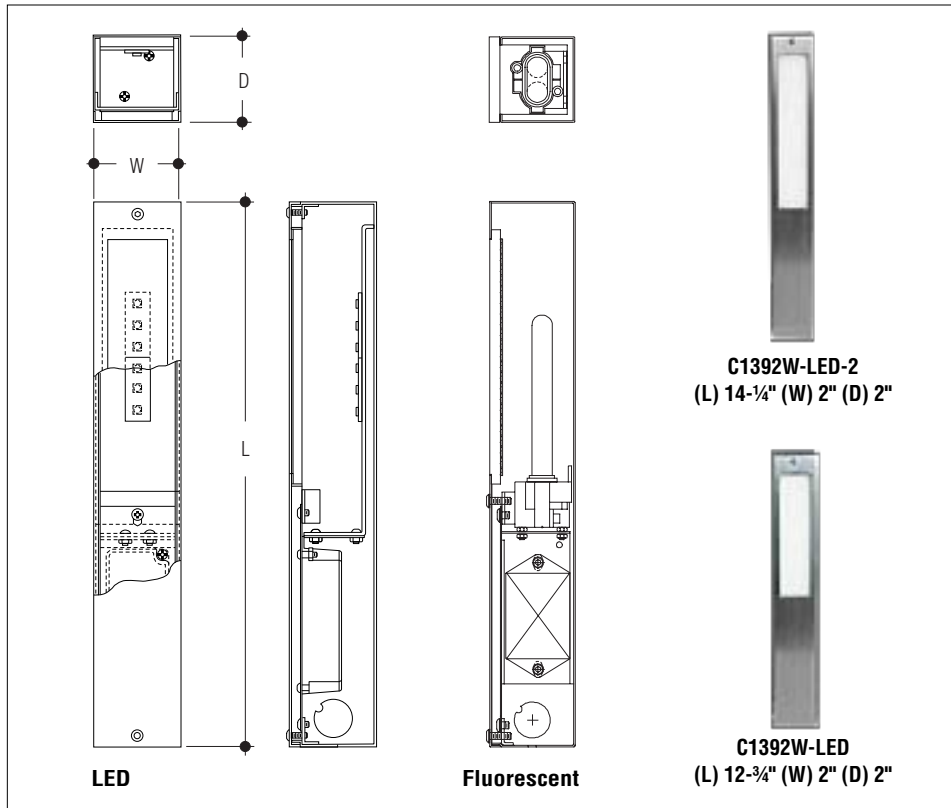

Catalog Number Lamp		Housing W & D	Housing Length	*OPTIONAL 1/2" KO'S AT BOTTOM
LED 1.5W, (126 lm @ 3000°K)	<input type="checkbox"/> C1392W-LED	<input type="checkbox"/> 2" x 2"	<input type="checkbox"/> 12 3/4"	<input type="checkbox"/> 1
LED 3.2W, (331 lm @ 3000°K)	<input type="checkbox"/> C1392W-LED-HO	<input type="checkbox"/> 2" x 2"	<input type="checkbox"/> 12 3/4"	<input type="checkbox"/> 1
LED 3.0W, (252 lm @ 3000°K)	<input type="checkbox"/> C1392W-LED-2	<input type="checkbox"/> 2" x 2"	<input type="checkbox"/> 14 1/4"	<input type="checkbox"/> 1
LED 6.4W, (662 lm @ 3000°K)	<input type="checkbox"/> C1392W-LED-HO-2	<input type="checkbox"/> 2" x 2"	<input type="checkbox"/> 14 1/4"	<input type="checkbox"/> 1
One 7W (CFT7W/2G7) compact fluor.	<input type="checkbox"/> C1392W-7	<input type="checkbox"/> 2" x 2"	<input type="checkbox"/> 12 3/4"	<input type="checkbox"/> 1
One 9W (CFT9W/2G7) compact fluor.	<input type="checkbox"/> C1392W-9	<input type="checkbox"/> 2" x 2"	<input type="checkbox"/> 12 3/4"	<input type="checkbox"/> 1
One 13W (CFT13W/2GX7) compact fluor.	<input type="checkbox"/> C1392W-13	<input type="checkbox"/> 2" x 2"	<input type="checkbox"/> 12 3/4"	<input type="checkbox"/> 1
One 18W (FT18W/2G11) compact fluor.	<input type="checkbox"/> C1392W-18	<input type="checkbox"/> 2-1/2" x 2-1/2"	<input type="checkbox"/> 18 1/2"	<input type="checkbox"/> 1
One 24W (FT24/27W/2G11) compact fluor.	<input type="checkbox"/> C1392W-24	<input type="checkbox"/> 3" x 2-1/2"	<input type="checkbox"/> 24"	<input type="checkbox"/> 2
One 36W (FT36/39W/2G11) compact fluor.	<input type="checkbox"/> C1392W-36	<input type="checkbox"/> 3" x 2-1/2"	<input type="checkbox"/> 27"	<input type="checkbox"/> 2

* Optional 1/2" KO's at bottom assumes standard locknuts and side by side spacing

Lumens shown are source. Photometric data can be downloaded at: www.colelighting.com/downloads/1

Options

Ballast: 277V. Add suffix -277.

Alternate housing dimensions:

Add suffix -SP/ _____
(dimensions).

Alternate shielding: Contact factory for options.

Add suffix -OS.

Double sided: Provides apertures on opposing sides. Add suffix -2S (N/A HO or HO-2).

Bottom knockout: 1/2" knockout at bottom in lieu of standard side knockouts (3" wide housing suitable for two knockouts). Add suffix -BKO

LED color: 4000°K. Add suffix -4K

Painted finish: Add suffix -CC/ _____
Satin stainless steel is standard. (color)



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com