


**JOB NAME** \_\_\_\_\_

**Type** \_\_\_\_\_

**CATALOG NUMBER** \_\_\_\_\_

## Steplites 252 SERIES

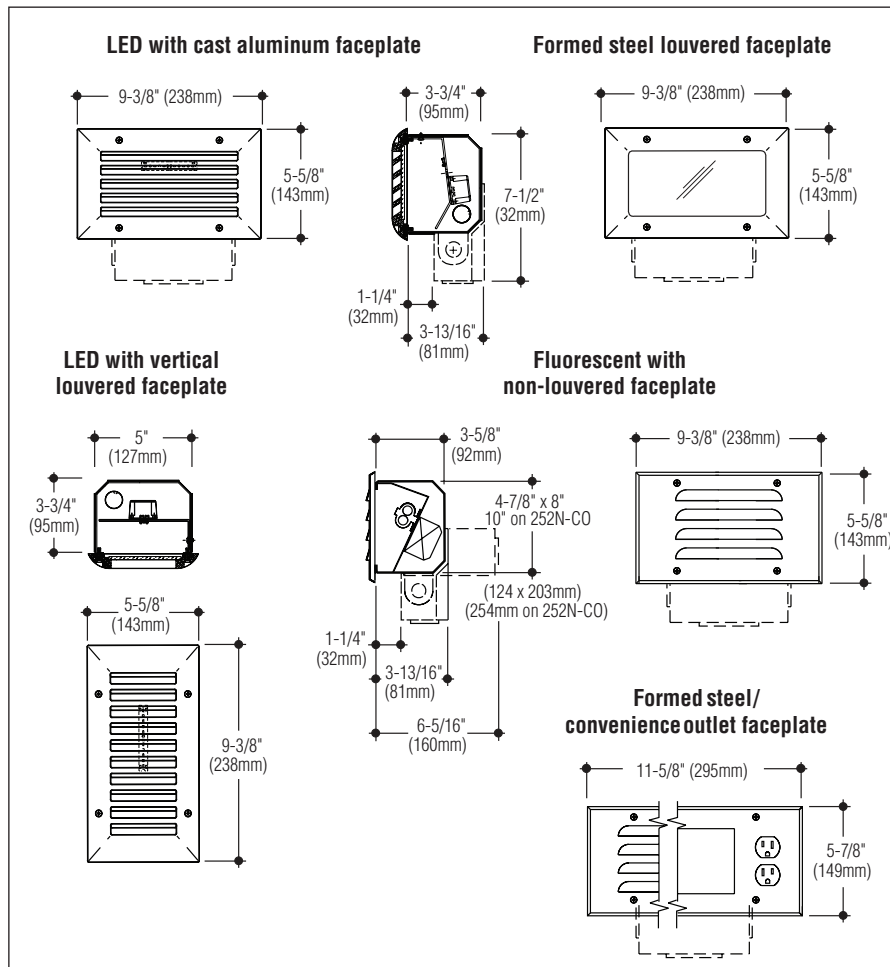

### SPECIFICATIONS

#### Construction

- Housing is constructed from 16 gauge electro-galvanized steel finished with a white polyester coating
- Faceplate is cast aluminum or 20 gauge steel with metallic aluminum polyester coating, or 20 gauge satin stainless steel (models with convenience outlet only available in satin stainless steel)
- Diffuser is frosted tempered glass
- Wet location models have diffuser set in silicone sealant with faceplates gasketed and retained by stainless steel screws
- Reflector is constructed of white aluminum
- Optional junction box is cast aluminum with white polyester coating
- cETLus listed suitable for installation in concrete pour/block wall construction
- LED and fluorescent models suitable for wet locations, except in CO models, in any wall construction.

#### Electrical

- Fixture is wired with high performance LEDs, one compact fluorescent or one 40W A19 incandescent lamp
- Driver and ballast are standard universal voltage
- Housing provided with 1/2" conduit knockout on each side suitable for 4 wire thru-wiring, 2 in and 2 out
- Optional junction box allows 8 wire thru-wiring, 4 in and 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" tapped conduit entrance in each side.

#### Mounting

Housing has flange with holes for mounting.

Catalog Numbers	Cast aluminum faceplate			Formed steel faceplate		Formed steel/convenience outlet	
	Louwer, Hor.	Louwer, Vert.	Non-Louwer	Louwer	Non-Louwer	Louwer	Non-Louwer
LED 1.5W, (126 lm @ 3000°K)	<input type="checkbox"/> L252W-L26	<input type="checkbox"/> L252W-L26V	<input type="checkbox"/> L252W-L26G	<input type="checkbox"/> L252W	<input type="checkbox"/> L252GW	<input type="checkbox"/> L252-N-CO	<input type="checkbox"/> L252G-N-CO
LED 3.6W, (215 lm @ 3000°K)	<input type="checkbox"/> L252W-L26-HO	<input type="checkbox"/> L252W-L26V-HO	<input type="checkbox"/> L252W-L26G-HO	<input type="checkbox"/> L252W-HO	<input type="checkbox"/> L252GW-HO	<input type="checkbox"/> L252-N-CO-HO	<input type="checkbox"/> L252G-N-CO-HO
LED 7.2W, (430 lm @ 3000°K)	<input type="checkbox"/> L252W-L26-HO-2	<input type="checkbox"/> L252W-L26V-HO-2	<input type="checkbox"/> L252W-L26G-HO-2	<input type="checkbox"/> L252W-HO-2	<input type="checkbox"/> L252GW-HO-2	<input type="checkbox"/> L252-N-CO-HO-2	<input type="checkbox"/> L252G-N-CO-HO-2
One 7W or 9W, (2G7 base) com. flor.	<input type="checkbox"/> F252W-L26	<input type="checkbox"/> F252W-L26V	<input type="checkbox"/> F252W-L26G	<input type="checkbox"/> F252W	<input type="checkbox"/> F252GW	<input type="checkbox"/> F252-N-CO	<input type="checkbox"/> F252G-N-CO
One 40W, A19 med base incand.	<input type="checkbox"/> T252W-L26	<input type="checkbox"/> T252W-L26V	<input type="checkbox"/> T252W-L26G	<input type="checkbox"/> T252W	<input type="checkbox"/> T252GW	<input type="checkbox"/> T252-N-CO	<input type="checkbox"/> T252G-N-CO

#### Options

**Junction box:** Bottom or back mounted junction box as required for feed-thru. Add suffix  -J.

**Bronze faceplate:** Satin finish, clear coated. Add suffix  -B.

**Stainless steel faceplate:** Standard on models with convenience outlet. To specify on formed steel faceplate models, add suffix  -N.

**Tamperproof screws:** Socket head faceplate screws. Add suffix  -TP.

**Dimming:** Universal voltage 0-10V driver. Add suffix  -DIM.

**Hospital grade convenience outlet:** Add suffix  -HCO in lieu of  -CO in model number.

**Alternate faceplate color:** Black, white or custom color. Add suffix  -BLK,  -WHT or  -CC (Contact factory for custom preference).

**Opal glass diffuser:** Tempered. Add suffix  -OPL.

**LED colors:** 4000°K (146 lm), HO (249 lm), HO-2 (498 lm). Add suffix  -4K.

Amber.\* Add suffix  -AMB.

Blue.\* Add suffix  -BLU.

\*Not available in HO-2.

#### How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



**C.W. Cole & Company, Inc.**  
 2560 N. Rosemead Boulevard  
 South El Monte, CA 91733-1593

Tel. (626) 443-2473  
 Fax (626) 443-9253  
 info@colelighting.com  
[www.colelighting.com](http://www.colelighting.com)