

**JOB NAME** \_\_\_\_\_


**TYPE** \_\_\_\_\_

**CATALOG NUMBER** \_\_\_\_\_

**Exits**

## Traditional Edgelighted Exit

**KCL-612 Series**

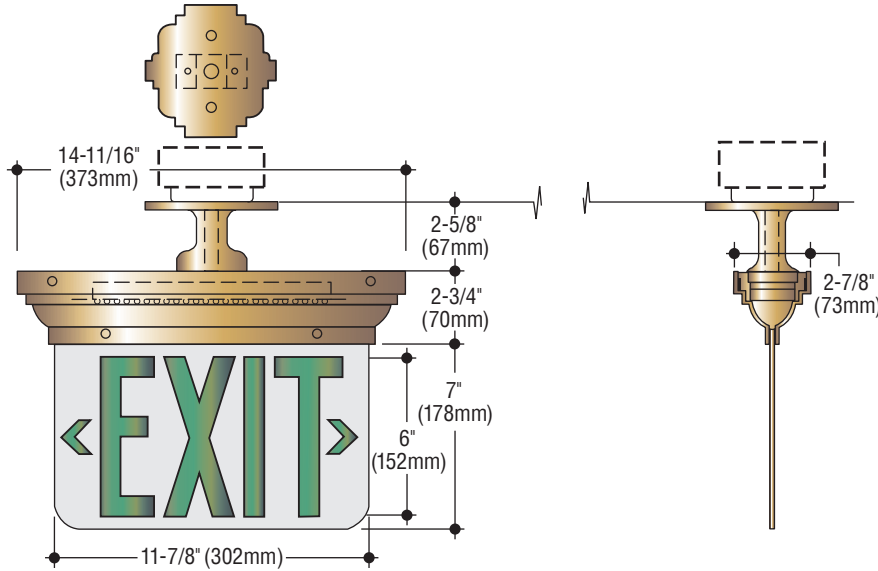

**SPECIFICATIONS**

**Construction**

- Clear glass panel with 6" sandblasted green or red letters and white backing
- Single or doubled faced
- Housing and bracket are cast aluminum with bronze painted finish.

**Electrical**

- When emergency battery operation is specified, all components are contained in housing. Nickel cadmium battery, test light and button, LEDs or two F6T5 fluorescent lamps are included with the -EM option.

**Mounting**

Decorative bracket mounts to outlet box for ceiling, end, or back mounting.

| Catalog Numbers                                 | Single Face                      |                                  |                                  | Double Face                       |                                   |
|---|----------------------------------|----------------------------------|----------------------------------|-----------------------------------|-----------------------------------|
|   | Back                             | Ceiling                          | End                              | Ceiling                           | End                               |
| LED Light-emitting diode .4W (Red), .3W (Green) | <input type="checkbox"/> KWL-612 | <input type="checkbox"/> KCL-612 | <input type="checkbox"/> KBL-612 | <input type="checkbox"/> KCLD-612 | <input type="checkbox"/> KBLD-612 |

**Required suffixes**

|              |             |             |
|--------------|-------------|-------------|
| Letter color | <b>-RED</b> | <b>-GRN</b> |
| Voltage      | <b>-120</b> | <b>-277</b> |

**Options**

**Directional arrows:**

- Arrow left **-AL**.
- Arrow right **-AR**.
- Doublehead **-A2**.
- Left and right (for double face) **-A**.

**Emergency battery operation:** Integral circuitry for 1-1/2 hour LED operation. Add suffix **-EM**.

**Tamperproof screws:** Socket head faceplate screws. Add suffix **-TP**.

**Clear sandblasted glass:** Add suffix **-GLS**.

**Pendant mount:** Provides canopy and one 18" stem. Use ceiling model number and add suffix **-S1**.

**Alternate color:**

- Black. Add suffix **-BLK**.
- White. Add suffix **-WHT**.
- Aluminum. Add suffix **-ALM**.

**How to Specify**

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



**C.W. Cole & Company, Inc.**  
 2560 N. Rosemead Boulevard  
 South El Monte, CA 91733-1593

Tel. (626) 443-2473  
 Fax (626) 443-9253  
 info@colelighting.com  
[www.colelighting.com](http://www.colelighting.com)