


JOB NAME _____

Type _____

CATALOG NUMBER _____

Signlighter

SL SERIES

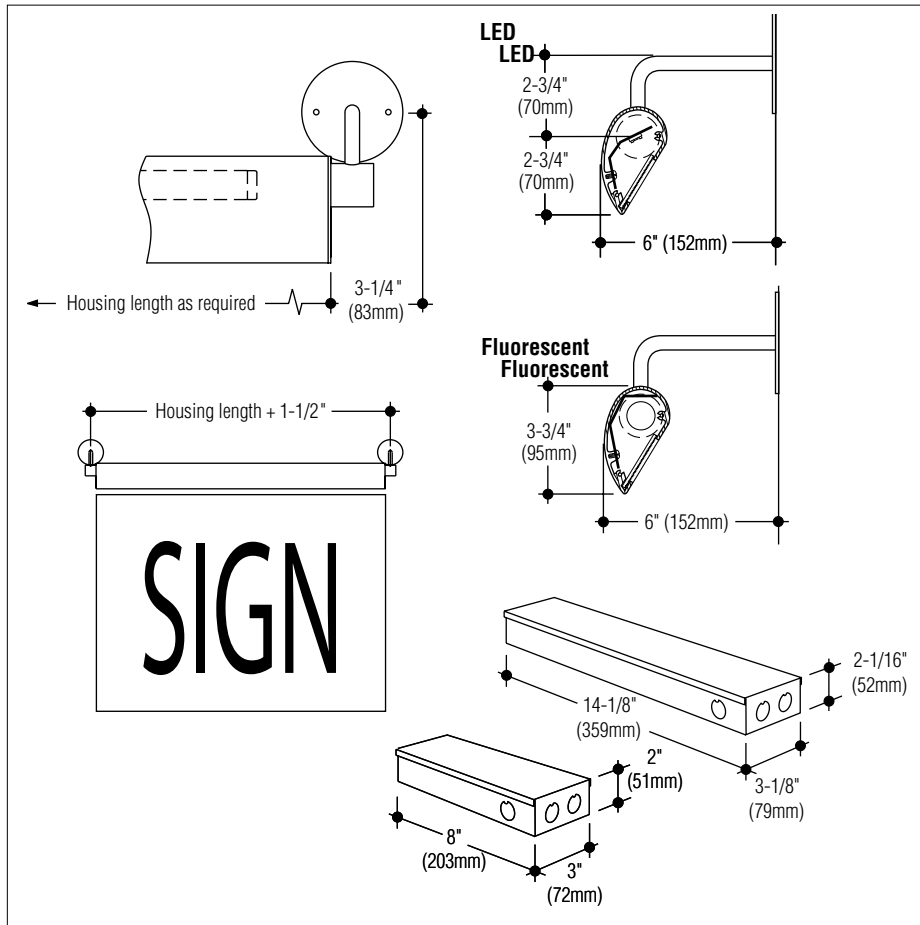

SPECIFICATIONS

Construction

- Fixture housing is extruded aluminum; maximum continuous length is 10' ft.
- Finish is metallic aluminum polyester coating. Other finishes are available.
- Lens is clear acrylic for LED and linear prismatic for fluorescent
- Housing is adjustable for vertical light distribution
- Suitable for wet locations with lamp above lens
- ETL/cETL listed.

Electrical

- Fixture is wired for LED, T8, T5, or T5 HO fluorescent lamp(s), available in various lengths, as required
- Remote driver and electronic ballast are universal voltage. Connecting flexible conduit not included.

Mounting

- Brackets mount with two screws (not included)
- Left bracket to be mounted over conduit flush with wall, unless otherwise specified
- Remote driver/ballast enclosure to be within 18" of lamp

How to Specify

1. Select catalog number and add length required.
2. Add suffixes for options required to meet job conditions.

Catalog Number

Lamp

- | | |
|---|---|
| LED 6.0W, per foot (503 lm @ 3000°K) | <input type="checkbox"/> SL-(Housing length): _____ -LED |
| LED/HO 14.4W, per foot (860 lm @ 3000°K) | <input type="checkbox"/> SL-(Housing length): _____ -LED-HO |
| T8 fluor., sizes to fit housing length | <input type="checkbox"/> SL-(Housing length): _____ -T8 |
| T5 fluor., sizes to fit housing length | <input type="checkbox"/> SL-(Housing length): _____ -T5 |
| T5/HO fluor., sizes to fit housing length | <input type="checkbox"/> SL-(Housing length): _____ -T5-HO |

- Notes: 1. Housing length must be at least 3 1/2" more than the nominal lamp length.
 Example: SL-39 1/2" is minimum for 36" F25T8 lamp.
2. Maximum continuous housing length is 10' ft. (3048mm)

Options

Alternate Arms Length:

Add suffix -ARM/ _____ (specify arm length).

Cable Support: Recommended for use with long mounting arms. Add suffix -CS.

Alternate Painted Finishes:

Black, add suffix -BLK.

White, add suffix -WHT.

Custom color. Specify. Add suffix -CC

Brushed Natural Finish: Satin clear anodized.

Add suffix -BNF.

Weatherproof: Standard with lens below lamp.

To add acrylic shield when lens is above lamp.

Add suffix -WU.

LED color: 4000°K (584 lm). Add suffix -4K



C.W. Cole & Company, Inc.
 2560 N. Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com