


JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Mirror Lite ML SERIES

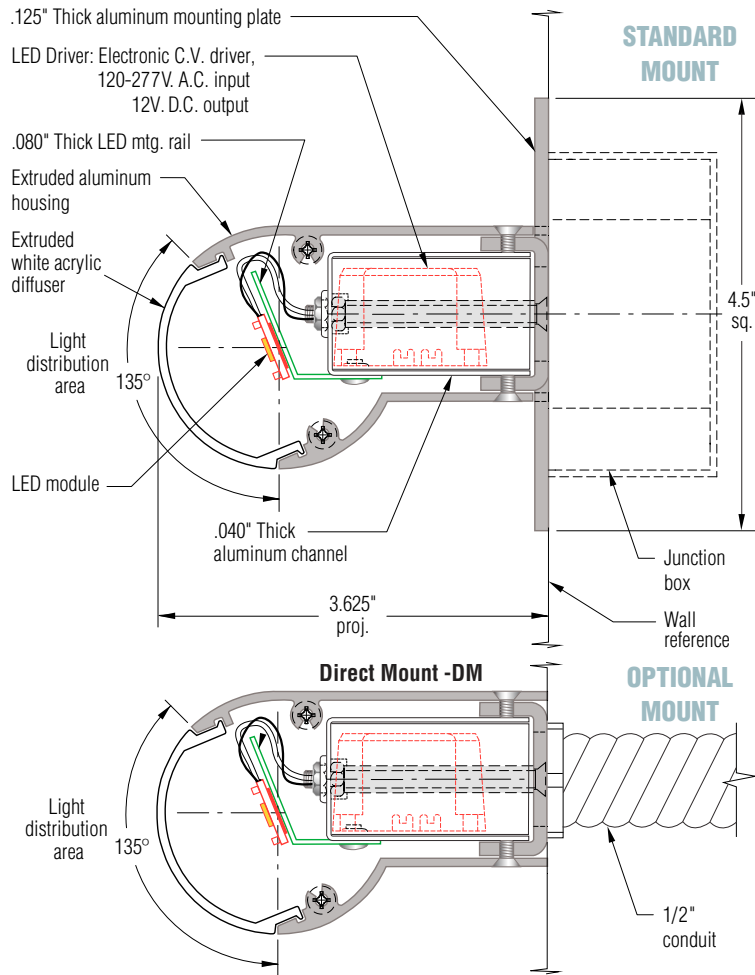

SPECIFICATIONS

Construction

- Extruded aluminum housing • Snap-in white acrylic diffuser • .125 aluminum mounting plate/junction box cover • Brushed aluminum finish with clear coating.

Electrical

- LEDs are 3000°K or optional 2700°K or 4100°K in standard or high output • Available with convenience outlets and switch • Integral universal voltage driver.

Mounting

- Holes in back of mounting plate for direct attachment to junction box.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.
3. Provide required length(s) or drawing of required layout.

Catalog Numbers	Standard lengths			Custom length
	18"(457mm)	24"(610mm)	36"(660mm)	
LED 6.0W, (503 lm,@ 3000°K) per ft.	<input type="checkbox"/> ML18 (503 lm)	<input type="checkbox"/> ML24 (755 lm)	<input type="checkbox"/> ML36 (1258 lm)	<input type="checkbox"/> ML -(Housing length) _____
LED 12.5W, (1323 lm,@ 3000°K) per ft.	<input type="checkbox"/> ML18-HO (1323 lm)	<input type="checkbox"/> ML24-HO (1985 lm)	<input type="checkbox"/> ML36-HO (3308 lm)	<input type="checkbox"/> ML -(Housing length) _____ -HO

Indicated lumens are source.

Options

Direct Mount: Omits mounting plate.

Add suffix **-DM**.

Convenience Outlet: Single grounded outlet at either end of housing. Add suffix **-CO**.

Rocker switch: Integral switch at either end of housing. Add suffix **-SW**.

Alternate finishes on fixture housing:

Brushed nickel plated. Add suffix **-BN**.

Polished chrome plated. Add suffix **-PC**.

Polished aluminum, clear coated. Add suffix **-PA**.

White: polyester powder coated. Add suffix **-WHT**.

Custom color: consult factory. Add suffix **-CC/** _____ (color)

Dimming: Universal voltage 0-10V capability. Add suffix **-DIM**.

LED colors:

4100°K per ft. (584 lm), (HO,1535 lm); (ML18, 584 lm), (ML18-HO, 1535 lm), (ML24, 876 lm), (ML24-HO, 2303 lm), (ML36, 1460 lm),(ML36-HO, 3838 lm), Add suffix **-41K**.

2700°K per ft. (482 lm), (HO,1270 lm); (ML18, 482 lm), (ML18-HO, 1270 lm), (ML24, 723 lm), (ML24-HO, 1905 lm), (ML36, 1205 lm),(ML36-HO, 3175 lm), Add suffix **-27K**.



C.W. Cole & Company, Inc.
2560 Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com