


JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Mirror Lite ML SERIES

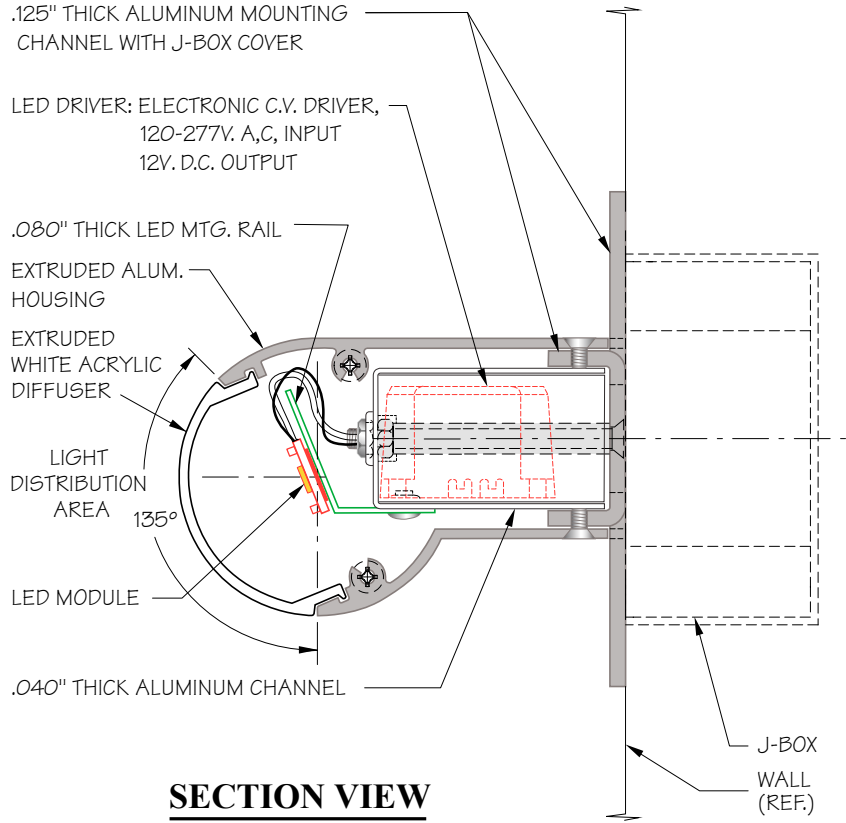

SECTION VIEW

SPECIFICATIONS

Construction

- Extruded aluminum housing • Snap-in white acrylic diffuser • Removable solid end caps
- .125 aluminum mounting plate/junction box cover • Polished chrome with clear coating.

Electrical

- LEDs are 3000°K or optional 4100°K in standard or high output • Available with convenience outlets and switch • Integral universal voltage driver • Limit of two convenience outlets per lighting fixture.

Mounting

- Holes in back of mounting plate for direct mounting to junction box.

Catalog Numbers	Standard Lengths			Custom Length
	18" (457mm)	24" (610mm)	36" (660mm)	
LED 6.0W per ft. (503 lm @ 3000°K)	<input type="checkbox"/> ML18	<input type="checkbox"/> ML24	<input type="checkbox"/> ML36	<input type="checkbox"/> ML- (Housing length) _____
LED 12.5W per ft. (1323 lm @ 3000°K)	<input type="checkbox"/> ML18-HO	<input type="checkbox"/> ML24-HO	<input type="checkbox"/> ML36-HO	<input type="checkbox"/> ML- (Housing length) _____ -HO

Indicated lumens are source lumens.

Convenience Outlet: Single grounded outlet at either end of housing. Add suffix -CO.

Switch: Integral illuminated rocker switch at either end of housing. Add suffix -SW.

LED colors: 4100°K (584 lm), (HO, 1535 lm). Add suffix -4K.

Alternate Finishes on fixture housing:

Satin Nickel. Add suffix -STN.

White: polyester coating. Add suffix -WHT.

For custom color, add suffix -CC/color (consult factory).

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.
3. Provide required length(s) or drawing of required layout.



C.W. Cole & Company, Inc.
 2560 N. Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473
 Fax (626) 443-9253
 info@colelighting.com
www.colelighting.com