

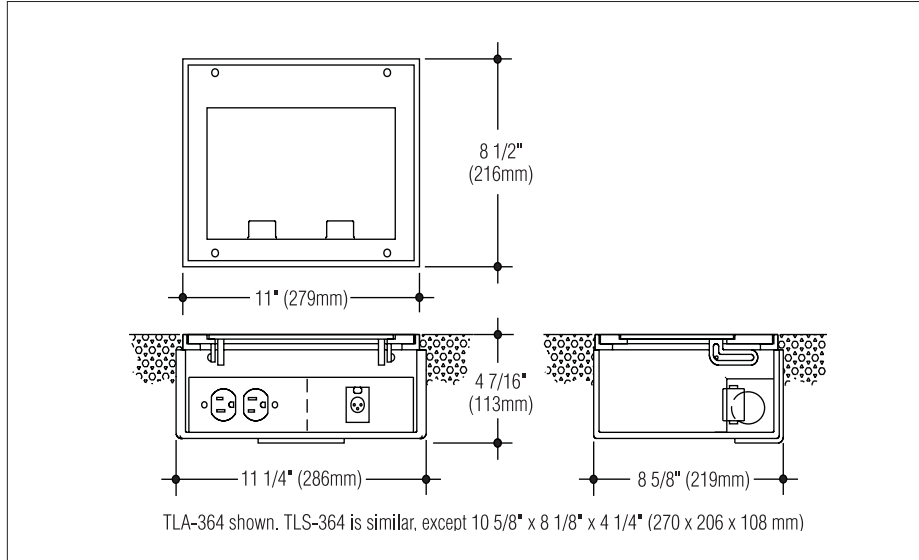
**JOB NAME** \_\_\_\_\_

**Type** \_\_\_\_\_

**CATALOG NUMBER** \_\_\_\_\_

**Plugging Boxes**

## 364 SERIES



### Specifications

#### Construction

- Cover is cast aluminum
- Standard cover door has non-skid grid and is self-closing with a cord slot
- Cover is finished with black polyester coating
- Models with Finish Trim or Carpet Flange option have smooth surface with satin aluminum finish
- TLA-364: housing and leveling collar are cast aluminum
- TLS-364: housing is 16 gauge steel

#### Electrical

- Various wiring devices or combinations are available as indicated with catalog suffixes
- Units with multiple-voltage devices have metal interior barrier between compartments
- TLA-364 housing has two 1/2" trade-size tapped conduit entrances
- TLS-364 housing has six 1/2"-3/4"-1" combination trade size conduit entrances
- Listed by cETLus







#### Mounting

- TLS-364: Box designed to be recessed in hardwood floors with no overlap. Particularly suitable for installation in existing floors where box flexes with floor
- TLA-364: Box designed for poured concrete floors. Frame, with leveling screws, is adjustable and is designed for dry-pack grout after cover is leveled to finished floor.

#### How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

### Catalog Numbers

Blank interior. No devices furnished	<input type="checkbox"/> TLS- / <input type="checkbox"/> TLA-364
Duplex U-ground power outlet on one side. 15 amp, 125 volt	<input type="checkbox"/> TLS- / <input type="checkbox"/> TLA-364-1 
Duplex 3-wire twist-lock outlet on one side. 15 amp, 125 volt	<input type="checkbox"/> TLS- / <input type="checkbox"/> TLA-364-2 
Single 3-pole microphone outlet and single 4-pole speaker outlet on one side. Low voltage	<input type="checkbox"/> TLS- / <input type="checkbox"/> TLA-364-3 
Duplex U-ground outlet on one side. Single 3-pole microphone outlet and single 4-pole speaker outlet on other side. 15 amp, 125 volt. Low voltage	<input type="checkbox"/> TLS- / <input type="checkbox"/> TLA-364-4 
Duplex 3-wire twist-lock power outlet on one side. Single 3-pole microphone outlet and single 4-pole speaker outlet on other side. 15 amp, 125 volt. Low voltage	<input type="checkbox"/> TLS- / <input type="checkbox"/> TLA-364-5 
Two single U-ground power outlets (NEMA 5-20) one side. 20 amp, 125 volt	<input type="checkbox"/> TLS- / <input type="checkbox"/> TLA-364-6 
Additional combinations of above or other stan- dard wiring devices (maximum of 4) as required. Specify complete requirements: _____	<input type="checkbox"/> TLS- / <input type="checkbox"/> TLA-364-6

### Options

**Bronze:** Satin finished red brass.

Add suffix  -B.

**Carpet Flange:** Includes Finish Trim.

Add suffix  -CF.

**Dust Cover Over Outlets:** Add suffix  -D.

**Cast Iron Housing:** Add suffix  -FE.

**Finish Trim:** Add suffix  -FT.

**COLE**  
*Lighting*

**C. W. Cole & Company, Inc.**  
2560 N. Rosemead Boulevard  
South El Monte, CA 91733-1593

**Fax** (626) 443-9253  
**Tel.** (626) 443-2473  
**info@colelighting.com**  
**www.colelighting.com**