

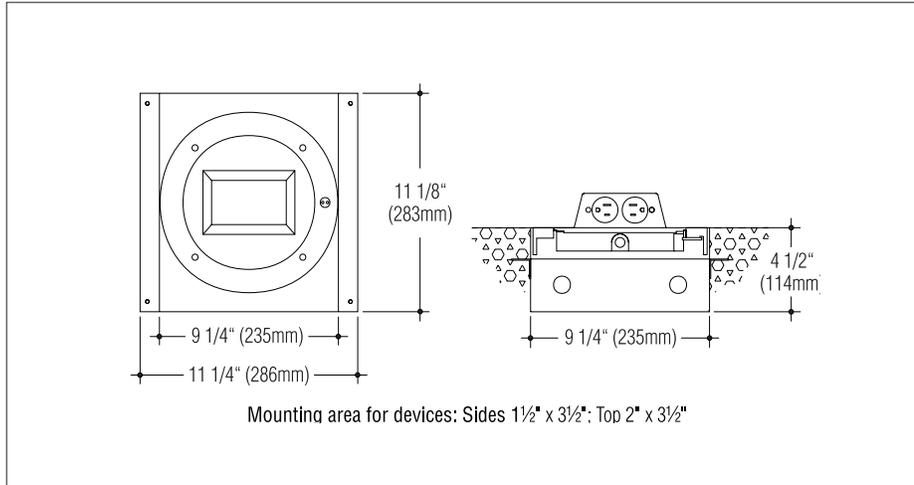
JOB NAME _____

Type _____

CATALOG NUMBER _____

Plugging Boxes

TLR SERIES Convertible Floor Box



Specifications

Construction

- Exposed parts are all cast brass • Housing is 16 gauge steel • Carpet flange is heavy spun brass • Standard finish on exposed parts is natural satin brass • Finish on housing is black polyester coating • Latch for rotating plate requires common switch key





Electrical

- Various wiring devices or combinations are available as indicated with catalog suffixes
- Devices may be factory-installed or blank device housing may be specified for field installation of devices • Device housing has barrier to separate different voltages • Housing has two separate wireways with four 1/2" trade-size conduit entrance in each and separate feed wireways to device housing

Mounting

- Housing is suitable for installation in poured concrete • Spun throw-away pan provides proper opening for leveling ring • Box designed for grout after leveling to finished floor
- Carpet flange substitutes for adjustment ring on standard floor box • Edge of flange overlaps onto carpet and bites into pile

Catalog Numbers

Single U-ground power outlet. 15 amp, 125 volt	<input type="checkbox"/> TLR-1 	<input type="checkbox"/> TLR-21 
Duplex U-ground power outlet. 15 amp, 125 volt	<input type="checkbox"/> TLR-1D 	<input type="checkbox"/> TLR-21D 
Single 3-wire twist-lock power outlet on one side. 15 amp, 125 volt	<input type="checkbox"/> TLR-2 	
Single 3-pole microphone outlet and single 4-pole speaker outlet on same side. Low voltage	<input type="checkbox"/> TLR-3 	
Single or duplex U-ground power outlet on one side, microphone / speaker combination on other side. 15 amp, 125 volt. Low voltage	<input type="checkbox"/> TLR-4 	<input type="checkbox"/> TLR-4D 
Single 3-wire twist-lock power outlet on one side, microphone / speaker combination on other side. 15 amp, 125 volt. Low voltage	<input type="checkbox"/> TLR-2 	
Additional combinations of above or other standard wiring devices as required. Maximum: Two 15 amp, 125 volt or two low-voltage devices per side. Specify complete requirements: _____	<input type="checkbox"/> TLR-2	

Options

Cast Iron Housing: Add suffix -FE.

Carpet Flange: Add suffix -CF.

Nickel plating: Matches aluminum appearance. Add suffix -NP.

J02

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C. W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Fax (626) 443-9253
Tel. (626) 443-2473
info@colelighting.com
www.colelighting.com