

JOB NAME _____

Type _____

CATALOG NUMBER _____

Steplites

153 SERIES

SPECIFICATIONS

Construction


- Fixture housing is constructed from die-formed 16 gauge electro-galvanized steel finished with a white polyester coating
- Faceplate is cast aluminum with metallic aluminum polyester coating, gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass set in silicone sealant
- Reflector is constructed of die-formed white aluminum
- cETLus listed, suitable for wet locations in any wall construction.

Electrical

- Fixture is wired with high performance LEDs, or one compact fluorescent lamp
- Driver is standard universal voltage
- Ballast is standard 120V (277V optional) electronic
- Integral junction box allows 8 wire thru-wiring, 4 in and 4 out. One 1/2" conduit knockout provided on each side of housing.

Mounting

Housing has flange with holes for mounting.

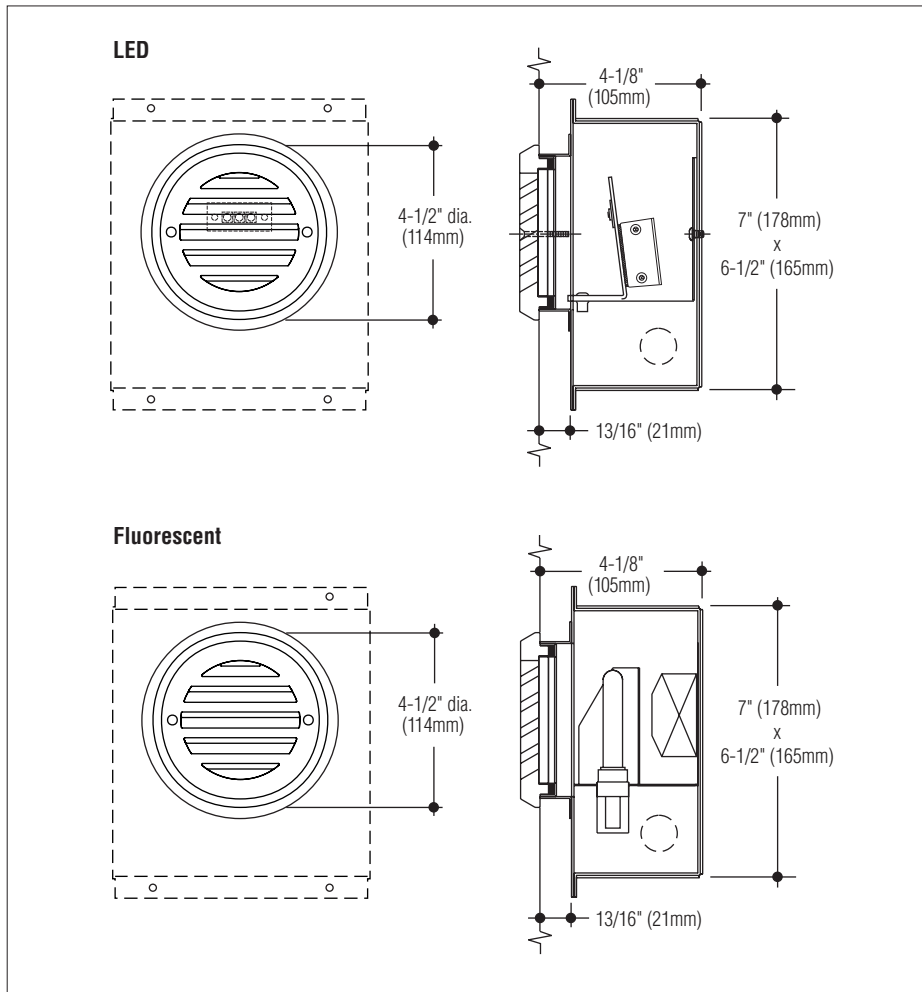

Catalog Number

Lamp

LED 4.2W, (260 lm @ 3000°K)

L153W

One 5W, (2G7) compact fluorescent

F153W

Options

Tamperproof screws: Socket head faceplate screws. Add suffix -TP.

Voltage: 277V ballast. Add suffix -277

(LED universal voltage standard)

Dimming: Universal voltage 0-10V driver.

Add suffix -DIM.

Bronze faceplate: Satin finish, clear coated.

Add suffix -B.

Alternate faceplate color: Black or white.

Add suffix -BLK or -WHT.

Opal glass diffuser: Tempered.

Add suffix -OPL.

LED color: 4000°K (265 lm). Add suffix -4K.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

COLE
Lighting

C.W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com