


**JOB NAME** \_\_\_\_\_

**Type** \_\_\_\_\_

**CATALOG NUMBER** \_\_\_\_\_

**Steplites**

## 159 SERIES

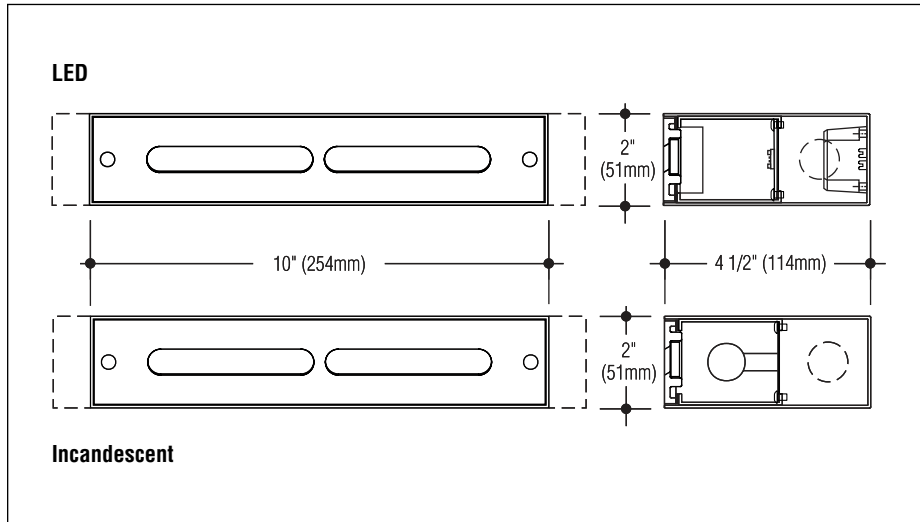

### SPECIFICATIONS

#### Construction

- Fixture is constructed from die-formed 18 gauge stainless steel
- Faceplate is cast aluminum with metallic aluminum polyester coating, gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass set in silicone sealant
- Reflector is constructed of die-formed white aluminum
- cETLus listed, suitable for wet locations, in concrete pour/block wall construction
- LED suitable for any wall construction.

#### Electrical

- Fixture is wired with high performance LEDs or one 20W T6-1/2 incandescent intermediate base lamp
- LED includes integral universal voltage driver
- One 1/2" conduit knockout provided on each side of housing. Suitable for 4 wire thru-wiring, 2 in 2 out.

#### Mounting

Housing has flange with holes for mounting.

### Catalog Number

#### Lamp

LED 1.5W, (126 lm @ 3000°K)

LED 3.6W, (215 lm @ 3000°K)

One 20W, T6½ intermediate base incandescent

**L159W**

**L159W-HO**

**T159W**

### Options

**Bronze faceplate:** Satin finish, clear coated.

Add suffix  **-B**.

**Tamperproof screws:** Socket head faceplate screws. Add suffix  **-TP**.

**Alternate faceplate color:** Black, white or custom color. Add suffix  **-BLK**,  **-WHT** or  **-CC**.

**Opal glass diffuser:** Tempered. Add suffix  **-OPL**.

**Dimming:** Universal voltage, 0-10V driver.

Add suffix  **-DIM**.

#### LED colors:

4000°K (146 lm), -HO (249 lm). Add suffix  **-4K**.

Amber (Not available in -HO). Add suffix  **-AMB**.

Blue (Not available in -HO). Add suffix  **-BLU**.

### How to Specify

1. Select catalog number.
2. Add suffixes for options required to meet job conditions.

**COLE**  
*Lighting*

**C.W. Cole & Company, Inc.**  
2560 N. Rosemead Boulevard  
South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

[www.colelighting.com](http://www.colelighting.com)