

JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Steplites

2159 SERIES 2159D SERIES DIRECTIONAL

SPECIFICATIONS

Construction


- Fixture housing is constructed from die-formed 16 gauge electro-galvanized steel finished with a white polyester coating
- Faceplate is cast aluminum with metallic aluminum powder coating, retained by stainless steel screws
- Diffuser in the 2159 is frosted tempered glass; the lens in the 2159D is ribbed tempered glass. Both are set in silicone sealant
- Reflector is constructed of white die-formed aluminum
- Optional junction box is cast aluminum with polyester coating
- cETLus listed, suitable for wet locations in any IC, non-IC and concrete/pour wall construction.

Electrical

- Fixture is wired with high performance LEDs or compact fluorescent lamps. Drivers and electronic ballast are universal voltage
- Housing provided with 1/2" conduit knockout on each side, suitable for 4 wire thru-wiring, 2 in 2 out
- Optional junction box allows 8 wire thru-wiring, 4 in 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" tapped conduit entrance in each side.

Mounting

Housing has flanges with holes for mounting.

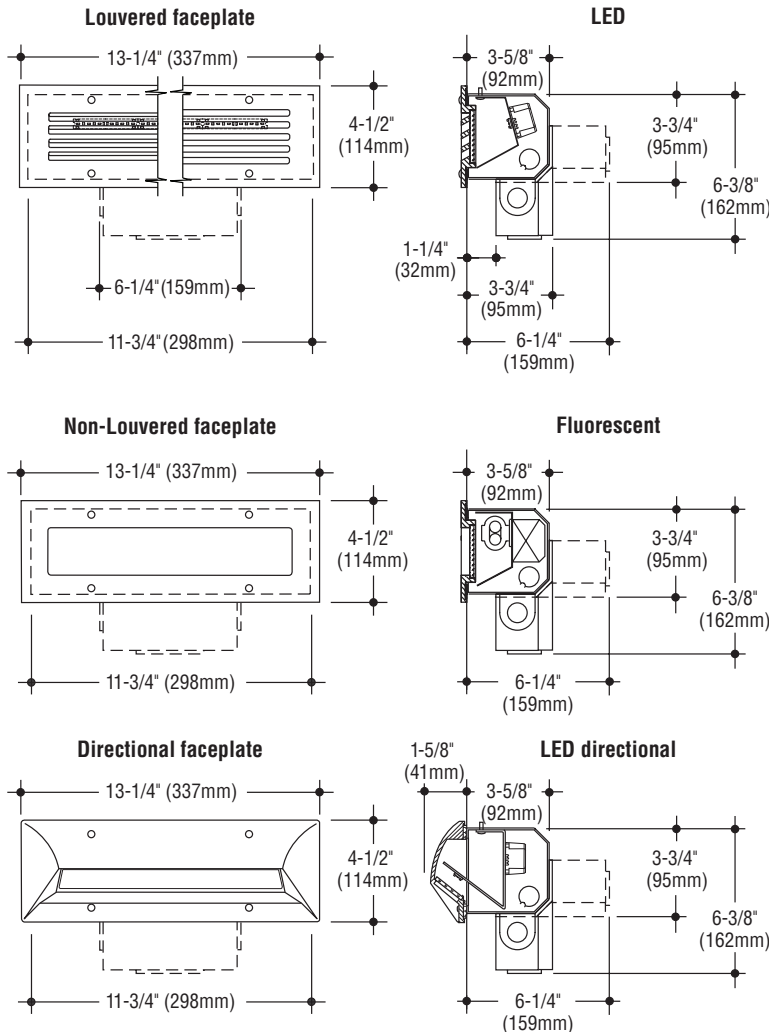

Catalog Numbers

Lamps

- LED 4.5W, (377 lm @ 3000°K)
- LED 10.8W, (645 lm @ 3000°K)
- One 13W, (CFT13W/2GX7) compact fluorescent
- One 18W, (FT18W/2G11) compact fluorescent
- One 26W, (CFQ26W/G24q-3) "quad" compact fluor.

Photometric data available for Steplites can be downloaded at: www.colelighting.com/downloads/1

Faceplate

Louver

- L2159W
- L2159W-HO
- F2159W-13
- F2159W-18
- F2159W-26

Non-Louver

- L2159GW
- L2159GW-HO
- F2159GW-13
- F2159GW-18
- F2159GW-26

Directional

- L2159DW
- L2159DW-HO
- F2159DW-13
- F2159DW-18
- F2159DW-26

Options

Junction box: Bottom or back mounted as required for feed-thru. Add suffix -J.

Sharp cutoff louver: Below horizontal illumination. Add suffix -SCL.

Bronze faceplate: Satin finished, clear coated. Add suffix -B.

Dimming: Universal voltage 0-10V driver. Add suffix -DIM.

Tamperproof screws: Socket head faceplate screws. Add suffix -TP.

LED colors: 4000°K (438 lm), -HO (747 lm).

Add suffix -4K. Amber. Add suffix -AMB.

Blue. Add suffix -BLU

Alternate faceplate color: Black or white.

Add suffix -BLK or -WHT.

Opal glass diffuser: Tempered (Not available on directional models). Add suffix -OPL.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com