


JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Steplites

FannyPack **XL**
2600 SERIES

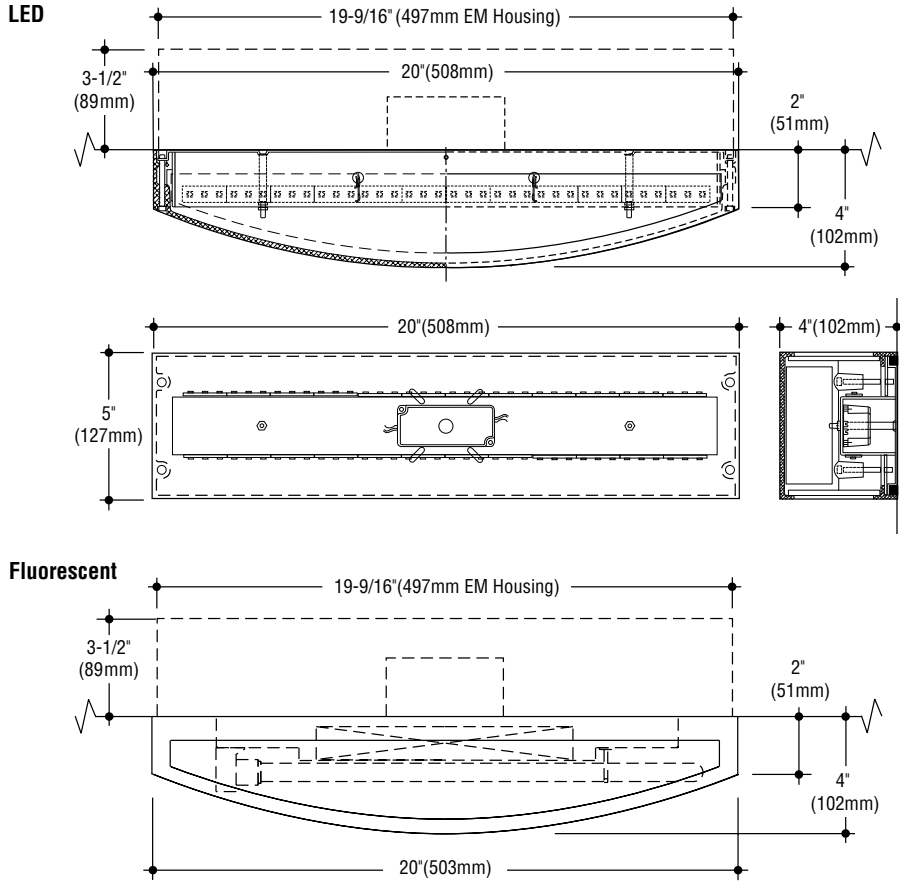

SPECIFICATIONS

Construction

- Housing is cast aluminum, mounted to 16 gauge stainless steel back mounting plate or recessed housing
- Finish is textured black polyester. Other finishes are available
- Trim is fastened in place by stainless steel mounting screws
- Fixture is furnished with diffuser in either top, bottom, or both
- Diffuser is set in silicone
- ADA compliant
- cETLus listed for wet locations on any wall construction.

Electrical

- Fixture is wired for LED or twin-tube compact fluorescent
- Integral drivers and ballast are universal voltage.

Mounting

- Slots on mounting plate allow mounting directly to junction box for LED and fluorescent models
- Recessed housing for LED and fluorescent models with emergency battery, have holes for mounting
- Fixture may be mounted with diffuser(s) in any position.

Catalog Number

Lamp	One diffuser	Two diffusers
LED 9.0W, (755 lm @ 3000°K per diffuser)	<input type="checkbox"/> L2600W-1-(diffuser)	<input type="checkbox"/> L2600W-2-(top diffuser/bottom diffuser)
LED 21.6W, (1290lm @ 3000°K per diffuser)	<input type="checkbox"/> L2600W-1-HO-(diffuser)	<input type="checkbox"/> L2600W-2-HO (top diffuser/bottom diffuser)
One 36W, (FT36W/2G11 base) compact fluorescent	<input type="checkbox"/> F2636W-1-(diffuser)	<input type="checkbox"/> F2636W-2-(top diffuser/bottom diffuser)

Photometric data available for Steplites can be downloaded at: www.colelighting.com/downloads/1

Options

Alternate finishes: Metallic aluminum or textured white. Add suffix -ALU or -WHT.

Diffusers: Select one or two diffuser choices. If same diffuser selected for two-diffuser models, state selection twice. (Example: L2518-2-ST/ST) Add suffixes as required.

- Frosted tempered glass -FG
- Ribbed glass spread lens -ST
- Prismatic tempered glass -C73
- Perforated panel/glass -PF
- Opal glass diffuser -OPL

Surface collar: Allows surface ballast and emergency ballast/driver location and/or surface conduit capability. Adds 2" (no longer complies with ADA) to overall fixture depth. Add suffix -SC.

Emergency battery: LED and fluorescent models only. Provides 90 minutes operation. Requires recessed housing or surface collar.

Add suffix -EM

LED colors: 4000°K (1133 lm),-HO (1935 lm).

Add suffix -4K.

Amber (FWC compliant 560 nm)

Add suffix -AMB.

Blue. Add suffix -BLU.

Dimming: Universal voltage 0-10V driver.

Add suffix -DIM.

How to Specify

1. Select catalog number.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com