

Steplites

Series	LED	Fluor.	HID	Dimming	Exterior	Interior	Feed-Thru	Other Options
2100	●	●			●	●	●	Faceplate finishes Emergency battery Junction box
3300			●		●		●	

2100/3300 SERIES

Description

The 2100/3300 Series of Steplites are high performance fixtures for medium size areas. Their large aperture allows high light levels to the sides and in front of the fixture for many interior and exterior locations. The rugged construction, engineering excellence, and quality make these fixtures ideal for specification in most public areas.

Features

Louvers in the 2100/3300 Series are more widely spaced than in most fixtures of this type, allowing for significantly greater forward projected illumination. Exceptional durability is provided by the thick cast aluminum louvered faceplate which protects the tempered glass diffuser while controlling the distribution of light. Cole Steplites feature an optional cast aluminum junction box which may be easily field mounted to either the back or bottom of the housing to best suit installation conditions.

Applications

The 2100/3300 Series Steplites are suitable for concrete pour/block wall and stud wall mounting in indoor or outdoor installations. The 3300 Series Steplites are suitable for concrete pour/block wall, ramps and stairwells. They are ideal in walls, ramps, and stairwells where high light levels are desirable.

Custom

If your project demands a special fixture we would be pleased to discuss the production of modified standard fixtures or custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.



L2100RW-J



HMH3350SW



HMH3350RGW



F2113SGW-J

2100/3300 Series steplites are available with round or square cast aluminum faceplates.



The junction box on Cole Steplites may be field mounted to the back or bottom of the fixture.

LED, fluorescent or metal halide lamps may be specified for this series.



C.W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com

Steplites

2100/3300 SERIES

SPECIFICATIONS

Construction


- Fixture housing is constructed from die-formed 16 gauge electro-galvanized steel finished with a white polyester coating
- Faceplate is cast aluminum with metallic aluminum powder coating, gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass, set in silicone sealant
- Reflector is constructed of die-formed white aluminum
- Optional junction box is cast aluminum with polyester coating
- 2100 Series is cETLus listed suitable for wet locations in any wall construction; 3300 Series suitable for wet locations in concrete pour/block wall construction.

Electrical

- Fixture is wired for high performance LEDs, two compact fluorescent lamps or metal halide.
- Integral driver and ballasts are universal voltage
- Housing provided with 1/2" conduit knockout on each side suitable for 4 wire thru-wiring, 2 in and 2 out
- Optional junction box allows 8 wire thru-wiring, 4 in and 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" tapped conduit entrance in each side.

Mounting

Housing has flanges with holes for mounting.

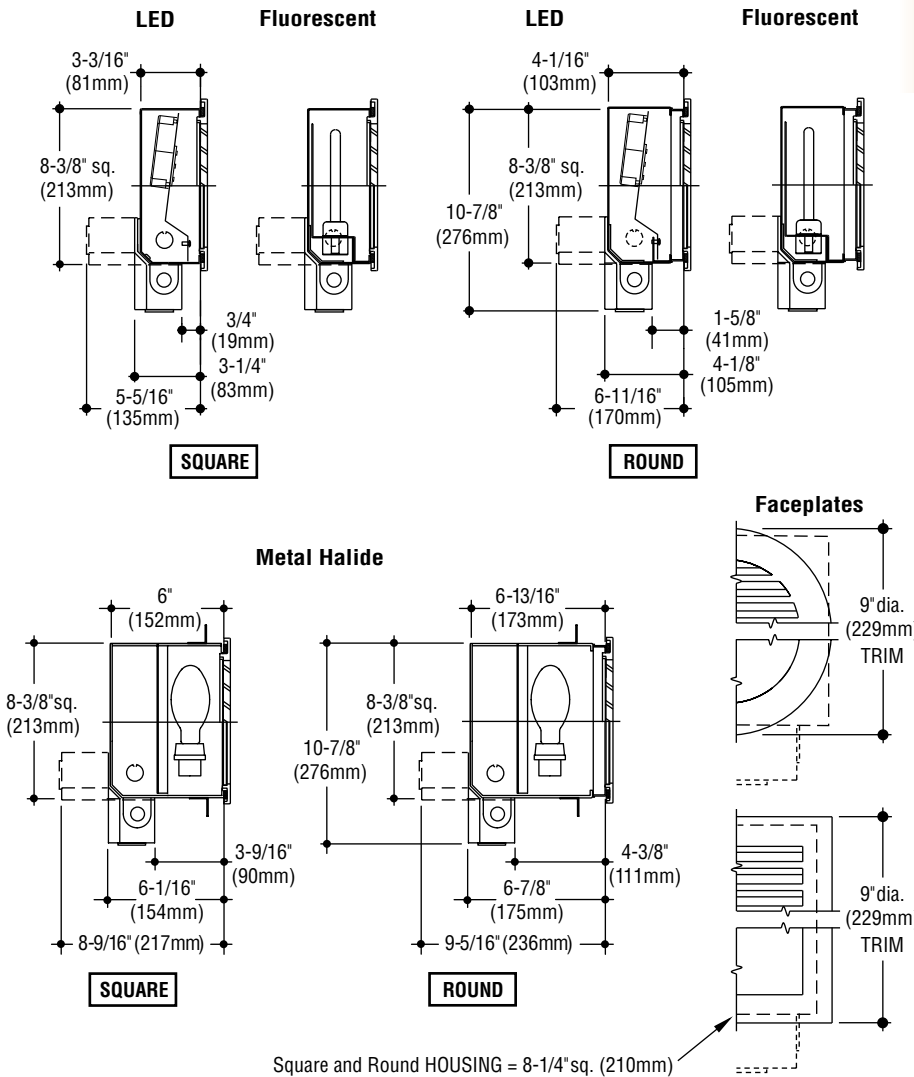

Catalog Numbers

Lamps	Faceplate		9" sq./Louver	9" sq./Non-Louwer
	9" dia./Louwer	9" dia./Non-Louwer		
LED 12.6W, (780 lm @ 3000°K)	L2100RW	L2100RGW	L2100SW	L2100SGW
Two 7W, (2G7 base) compact fluorescent	F2127RW	F2127RGW	F2127SW	F2127SGW
Two 9W, (2G7 base) compact fluorescent	F2129RW	F2129RGW	F2129SW	F2129SGW
Two 13W, (GX24q-1 base) compact fluor.	F2113RW	F2113RGW	F2113SW	F2113SGW
50W metal halide, medium base	HMH3350RW	HMH3350RGW	HMH3350SW	HMH3350SGW

Photometric data available for Steplites can be downloaded at: www.colelighting.com/downloads/1

Options

Junction box: Bottom or back mounted as required for feed-thru. (Standard on 3300 Series)

Add suffix **-J**.

Bronze faceplate: Satin finished, clear coated.

Add suffix **-B**.

Tamperproof screws: Socket head faceplate screws. Add suffix **-TP**.

Alternate faceplate color: Black or white.

Add suffix **-BLK** or **-WHT**.

Opal glass diffuser: Tempered. Add suffix **-OPL**

Voltage: 277V ballast. Add suffix **-277**.

Dimming: Universal voltage, 0-10V driver.

Add suffix **-DIM**.

Emergency battery: Provides up to 90 minutes operation and requires 6-7/8" (175mm) deep housing (Fluorescent only). Add suffix **-EM**.

LED color:

4100°K (795 lm). Add suffix **-4K**.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com