

## Steplites

Series	LED	Fluor.	HID	Dimming	Exterior	Interior	Feed-Thru	Other Options
300	●	●		●	●	●	●	Choice of diffusers Faceplate colors Bronze faceplate

## TL300 SERIES




### Description

The TL300 Steplite is an ultra low-profile site fixture with LED or fluorescent lamp options. Appropriate for low-level applications. Its width allows relatively wide light distribution to the side in a variety of interior or exterior locations. The rugged construction, engineering excellence, and quality makes this fixture ideal for specification in most public areas.

### Construction

- Fixture housing is constructed from die-formed 16 gauge stainless steel finished with a white polyester coating
- Faceplate is cast aluminum with silver metallic polyester finish or 3/16" stainless steel with brushed finish
- Diffuser on glass front and weatherproof louvered models is frosted tempered glass
- On weatherproof models, diffuser is set in silicone sealant and faceplate is retained by stainless steel screws
- Reflector is constructed of white die-formed aluminum
- Optional junction box is cast aluminum with polyester coating
- cETLus listed, suitable for wet locations when specified weatherproof, in any wall construction.

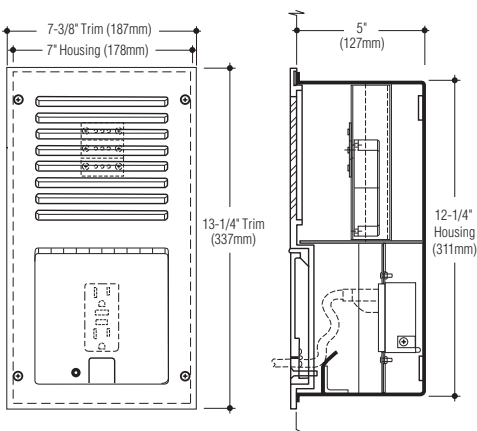

### Electrical

- Fixture is wired with high performance LED or compact fluorescent lamps. Drivers and electronic ballasts are universal voltage.

### Mounting

Housing has flange with holes for mounting.

### Catalog Number

#### Lamp

LED 4.2W, (260 lm @ 3000°K)  
 LED 12.6W, (780 lm @ 3000°K)  
 One 13W, (CFTR13W) fluorescent  
 One 18W, (CFTR18W) fluorescent

**TLL300W**  
**TLL300W-HO**  
**TLF313W**  
**TLF318W**

Photometric data available for Steplites can be downloaded at: [www.colelighting.com/downloads/1](http://www.colelighting.com/downloads/1)

### Options

**LED color:** 4000°K (285 lm), -HO (855 lm).

Add suffix **-4K**.

**Dimming:** Universal voltage 0-10V driver.

Add suffix **-DIM**.

**Tamperproof screws:** Socket head faceplate screws. Add suffix **-TP**.

**Bronze faceplate:** Satin finish, clear coated. Add suffix **-B**.

**Alternate faceplate color:** Black or white.

Add suffix **-BLK** or **-WHT**.

**Opal glass diffuser:** Tempered. Add suffix **-OPL**.

### How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



**C.W. Cole & Company, Inc.**  
**2560 N. Rosemead Boulevard**  
**South El Monte, CA 91733-1593**

**Tel. (626) 443-2473**  
**Fax (626) 443-9253**  
**info@colelighting.com**  
[www.colelighting.com](http://www.colelighting.com)