

Exits

Interior/Exterior Applications



L195-GRN-120

The Aluminex exit signs feature black extruded aluminum housing with natural satin finished face.



L296-RED-AL

Aluminex exits are available with surface, pendant, and recessed models.



L197-GRN-120-A2

Aluminex
Aluminum Exit Signs

Description

The Aluminex exit signs offer a stylish design suitable for a wide variety of applications. The aluminum construction is both visually pleasing and possesses corrosion-resistant qualities. The construction is designed so the sign will remain attractive and functional with minimal maintenance requirements.

Features

The exposed construction is black extruded aluminum with a natural satin finished stencil face. Weatherproof construction for exterior applications is optional. There is a choice of red or green LEDs with emergency operation as an option.

Applications

Aluminex exit signs are appropriate in schools, medical facilities, and all commercial facilities where a clean functional style is desired.

Custom

If your project demands a special fixture we would be pleased to discuss the production of custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.




C.W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com

Exits

Interior/Exterior Applications

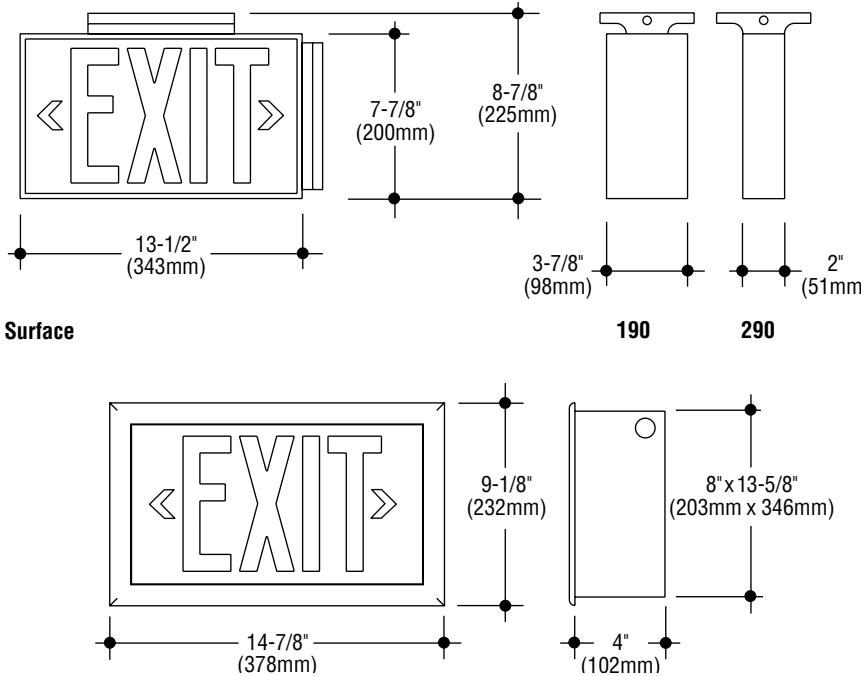

Aluminex Aluminum Exit Signs

SPECIFICATIONS

Construction

- Sign is constructed from extruded aluminum
- Recessed housing is 16 gauge steel, suitable for poured concrete construction
- Bracket is die-cast aluminum
- Surface housing, recessed sign trim, and bracket finish is semi-gloss black paint
- Face is natural satin finish with clear anodize
- Letters and arrows are stencil cut in faceplate, backed with .125" acrylic diffuser
- cETL listed, suitable for wet locations when specified.

Electrical

- Red or green LEDs are dual-circuit and dual-voltage
- When emergency battery operation is specified, all components are contained in housing (available for 190 Series only). Nickel cadmium battery, test light and button are included with the -EM option.

Mounting

Surface signs mount to junction box. Recessed housing has holes for mounting

Recessed

Doublehead arrows shown. Arrows only furnished as specified.

Catalog Numbers	190 Series						290 Series				
	Single Face			Double Face			Single Face			Double Face	
Lamps	Back	Ceiling	End	Recessed	Ceiling	End	Back	Ceiling	End	Ceiling	End
LED .4W (Red), .3W (Green)	L195	L196	L198	L197	LD196	LD198	L295	L296	L298	LD296	LD298

Required suffixes

Letter color	-RED	-GRN
Voltage	-120	-277

Options

Directional arrows:

- Arrow left **-AL**.
- Arrow right **-AR**.
- Doublehead **-A2**.
- Left and right (for double face) **-A**.

Tamperproof screws: Socket head faceplate screws. Add suffix **-TP**.

Emergency battery: Integral circuitry provides 90 minutes of operation (190 Series only).

Add suffix **-EM**.

Weatherproof: Add suffix **-W**.

Pendant mount: Provides canopy and one 18" stem. Use ceiling model number and add suffix **-S1**.

Pedestal mount: Provides threaded flange on bottom for 1-1/4" pipe (190 series only). Add suffix **-PED**.

Custom color: Contact factory for custom preference. Add suffix **-CC**.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com