
JOB NAME

CATALOG NUMBER

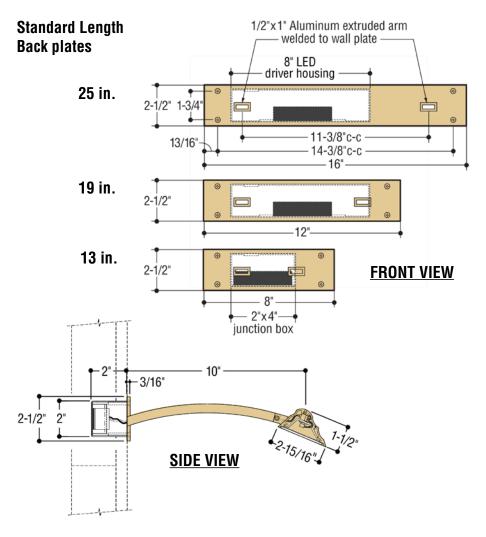

Catalog Numbers	Standard lengths			
	13"(330 mm)	19"(483 mm)	25"(635mm)	Custom length
LED 6.0W, (503 lm,@ 3000°K) per foot.	PL13 (503 lm)	PL19 (755 lm)	PL25 (1006 lm)	PL(Housing length)

Indicated lumens are source.

Options

Alternate Arms Length:		
10" arm length is standard.		
Add suffix		
(specify arm length).		
LED color:		
4000°K (584 lm) per foot. Add suffix 🗌 -4K		
2700°K (482 lm) per foot. Add suffix 🗌 -27K		
Dimming: 0-10v driver. Phase dimming is		
standard. Add suffix 🗌 -DIM/0-10		
Device: Integral rocker switch mounted on		
wall plate. Add suffixSW.		

Alternate Finishes:

Metallic Silver, polyester coated.

Add suffix \square -ALU.

White, polyester coated. Add suffix \square -WHT. Brushed nickel, plated. Add suffix \square -BN. Polished chrome, plated. Add suffix \square -PC.

Polished bronze, plated. Add suffix \square **-PB**. **Satin Bronze**, plated. Add suffix \square **-SB**.

Antique Bronze, plated. Add suffix — -AB. Custom RAL color. Specify color.

Add suffix . -CC

Type .

Picture Light

PL SERIES

SPECIFICATIONS

Construction

• Fixture housing is extruded aluminum, with lengths as required • Standard finish is black, polyester coated. Optional finishes include, white, metallic silver, RAL colors, as well as plated selections including nickel, brass and bronze • Diffuser is frosted acrylic, flush-fitting within housing aperture • Fixture mounting arms are welded onto a flush, continuous wall canopy spanning the mounting arms • cETLus listed for installation in damp locations.

Electrical

• Standard output LEDs are available in a variety of color temperatures • Integral universal voltage driver is standard • Drivers are located in a recessed housing located behind the left end of the wall canopy • Integral phase dimming driver is standard; optional 0-10V dimming driver is available.

Mountina

- Brackets mount with two screws (not included)
- Left bracket to be mounted over conduit flush with wall, unless otherwise specified

How to Specify

1. Select catalog number and add length required.



C.W. Cole & Company, Inc. 2560 Rosemead Boulevard South El Monte, CA 91733-1593

Tel. (626) 443-2473 Fax (626) 443-9253 info@colelighting.com www.colelighting.com