

JOB NAME _____

Type _____

CATALOG NUMBER _____

Steplites

158 SERIES

SPECIFICATIONS

Construction

- Fixture housing is constructed from die-formed 16 gauge electro-galvanized steel finished with a white polyester coating
- Faceplate is cast aluminum with metallic aluminum polyester coating, gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass, set in silicone sealant
- Reflector is constructed of die-formed white aluminum
- Optional junction box is cast aluminum with polyester coating
- Incandescent models suitable for concrete pour/block wall construction only; LED and fluorescent models suitable for any wall construction
- All models cETLus listed for wet locations.

Electrical

- Fixture is wired with high performance LEDs, one compact fluorescent or one 40W A19 incandescent lamp
- Driver is standard universal voltage
- Ballast is standard 120V (277V optional) electronic
- Housing provided with 1/2" conduit knockout on each side suitable for 4 wire thru-wiring, 2 in and 2 out
- Optional junction box allows 8 wire thru-wiring, 4 in and 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" tapped conduit entrance in each side.

Mounting

Housing has flange with holes for mounting.


How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions



C.W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com

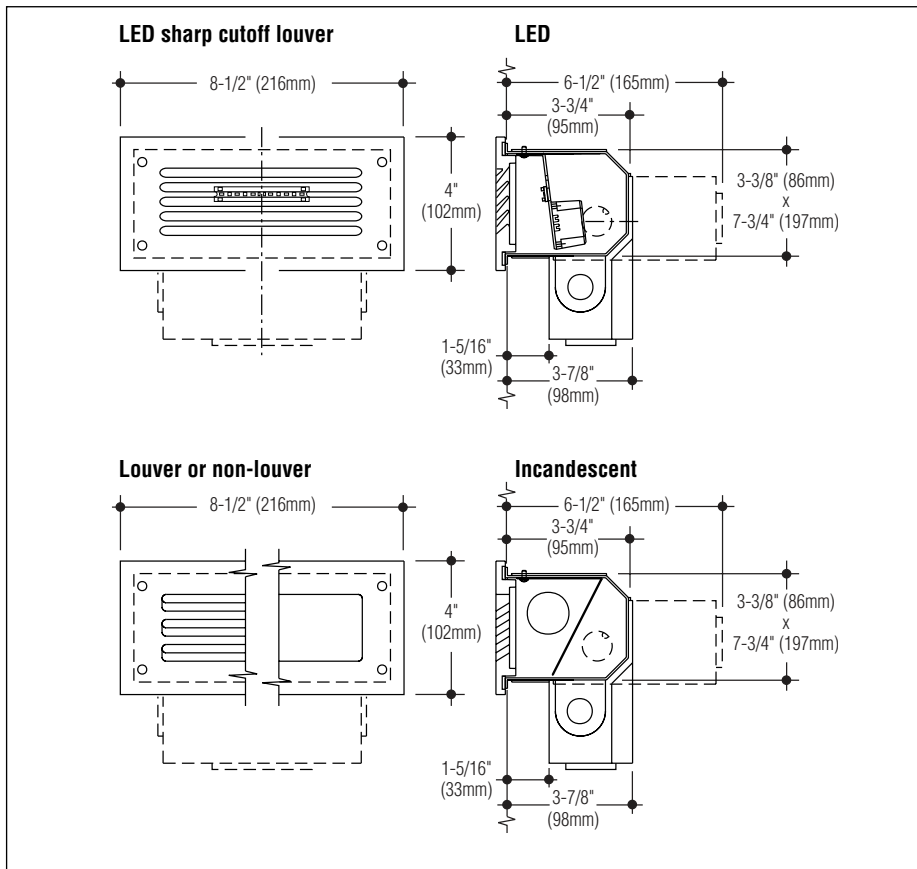

Catalog Numbers

Lamp

- LED 1.5W, (126 lm @ 3000°K)
- LED 3.6W, (215 lm @ 3000°K)
- LED 7.2W, (430 lm @ 3000°K)
- One 7W or 9W (2G7 base) compact fluorescent
- One 40W T10 medium base incandescent

Faceplate

Louver

- L158W**
- L158W-HO**
- L158W-HO-2**
- F158W**
- T158W**

Non-Louver

- L158GW**
- L158GW-HO**
- L158GW-HO-2**
- F158GW**
- T158GW**

Options

Junction box: Bottom or back mounted junction box for feed-thru. Add suffix **-J**.

Stainless steel faceplate: 3/16" thick narrow louvered faceplate. Add suffix **-N**.

Sharp cutoff louver: Below horizontal illumination. Add suffix **-SCL**.

Bronze faceplate: Satin finish, clear coated. Add suffix **-B**.

Stainless steel housing: 16 gauge stainless steel recessed housing. Add suffix **-SS**.

Voltage: Fluorescent ballast. Add suffix **-277**. (LED universal voltage standard).

Dimming: Universal voltage 0-10V driver. Add suffix **-DIM**.

Alternate faceplate color: Black, white or custom color. Add suffix **-BLK**, **-WHT**, or **-CC**.

Opal glass diffuser: Tempered. Add suffix **-OPL**.

Tamperproof screws: Socket head faceplate screws. Add suffix **-TP**.

LED colors:

4000°K (146 lm), -HO (249 lm), -HO-2 (498 lm).

Add suffix **-4K**.

Amber.* Add suffix **-AMB**.

Blue.* Add suffix **-BLU**.

*Not available in HO-2.