

**JOB NAME** \_\_\_\_\_

**TYPE** \_\_\_\_\_


**CATALOG NUMBER** \_\_\_\_\_

## Steplites

### 2153/3100 SERIES

### 2153D/3100D SERIES

### DIRECTIONAL

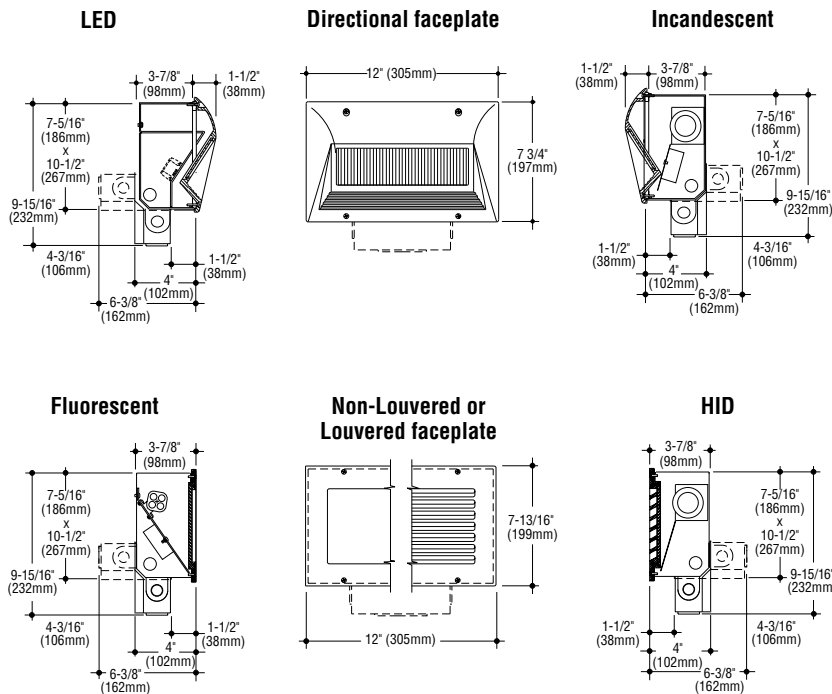

#### SPECIFICATIONS

##### Construction

- Fixture housing is constructed from die-formed 16 gauge electro-galvanized steel finished with a white polyester coating
- Faceplate is cast aluminum with metallic aluminum polyester coating, gasketed and retained by stainless steel screws
- Diffuser in 2153/3100 is frosted tempered glass; the lens in 2153D/3100D is ribbed tempered glass. Both are set in silicone sealant
- Reflector is constructed of die-formed white aluminum
- Junction box is cast aluminum with polyester coating; optional on LED, incandescent and fluorescent models, standard on HID models
- cETLus listed, suitable for wet locations
- LED and fluorescent models are suitable for any wall construction; Incandescent and HID models are for concrete pour/block wall construction only.

Catalog Numbers	Faceplate		
Lamps	Louver	Non-Louver	Directional
LED 3.0W, (252 lm @ 3000°K)	<input type="checkbox"/> L2153W	<input type="checkbox"/> L2153GW	<input type="checkbox"/> L2153DW
LED 7.2W, (430 lm @ 3000°K)	<input type="checkbox"/> L2153W-HO	<input type="checkbox"/> L2153GW-HO	<input type="checkbox"/> L2153DW-HO
LED 14.4W, (860 lm @ 3000°K)	<input type="checkbox"/> L2153W-HO-2	<input type="checkbox"/> L2153GW-HO-2	<input type="checkbox"/> L2153DW-HO-2
26W, (CFQ26W/G24q-3) fluorescent	<input type="checkbox"/> F2153W	<input type="checkbox"/> F2153GW	<input type="checkbox"/> F2153DW
50W, metal halide, medium base	<input type="checkbox"/> HMM3150W	<input type="checkbox"/> HMM3150GW	<input type="checkbox"/> HMM3150DW
100W, A21 medium base incandescent	<input type="checkbox"/> T2153W	<input type="checkbox"/> T2153GW	<input type="checkbox"/> T2153DW

Photometric data available for Steplites can be downloaded at: [www.colelighting.com/downloads/1](http://www.colelighting.com/downloads/1)

#### Options

- Bronze faceplate:** Satin finished, clear coated. Add suffix  -B.
- Tamperproof screws:** Socket head faceplate screws. Add suffix  -TP.
- Alternate faceplate color:** Black or white. Add suffix  -BLK or  -WHT.
- Opal glass diffuser:** Tempered (Not available on directional models). Add suffix  -OPL.
- LED colors:** 4000°K (292 lm), -HO (498 lm), -HO-2 (996 lm). Add suffix  -4K. Amber (Not available in HO-2). Add suffix  -AMB.
- Blue (Not available in HO-2). Add suffix  -BLU.
- Voltage:** 277V fluorescent ballast. Add suffix  -277 (Standard ballast are universal voltage)

- Dimming:** Universal voltage, 0-10V driver. Add suffix  -DIM
- Emergency battery:** Provides up to 90 minutes operation for both LED and fluorescent models. Add suffix  -EM.
- Junction box:** Bottom or back mounted as required for feed-thru. Standard on HID models. Add suffix  -J.

#### How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

#### Electrical

- Fixture is wired for lamps of varying types and wattages. Integral drivers and ballasts are universal voltage
- Housing provided with 1/2" conduit knockout on each side, suitable for 4 wire thru-wiring, 2 in 2 out
- Junction box allows 8 wire thru-wiring, 4 in 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" conduit tapped knockouts on side of housing.

#### Mounting

Housing has flanges with holes for mounting.



**C.W. Cole & Company, Inc.**  
 2560 N. Rosemead Boulevard  
 South El Monte, CA 91733-1593

Tel. (626) 443-2473  
 Fax (626) 443-9253  
 info@colelighting.com  
[www.colelighting.com](http://www.colelighting.com)