


JOB NAME _____

Type _____

CATALOG NUMBER _____

Steplites

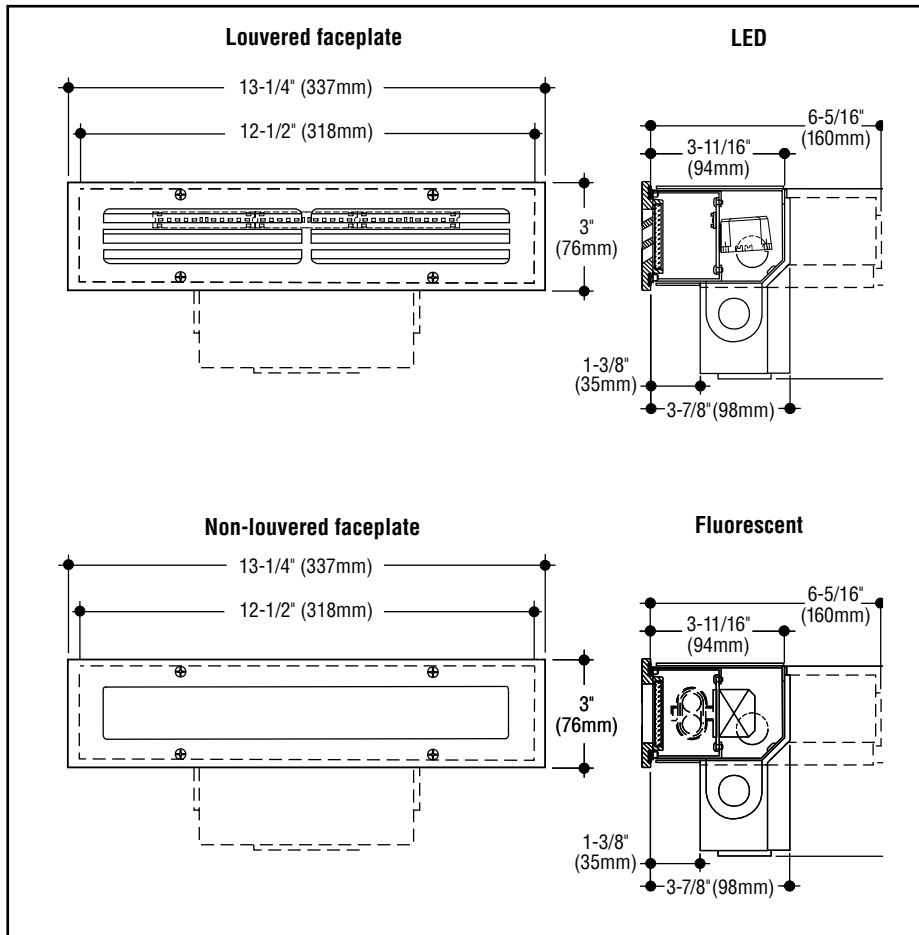

2158 SERIES

SPECIFICATIONS

Construction

- Fixture housing is constructed from die-formed 16 gauge electro-galvanized steel finished with a white polyester coating
- Faceplate is cast aluminum with metallic aluminum polyester coating or 3/16" stainless steel with brushed finish
- Faceplate is retained by stainless steel screws
- Diffuser is frosted tempered glass set in silicone sealant
- Reflector is constructed of white die-formed aluminum
- Optional junction box is cast aluminum with polyester coating
- cETLus listed, suitable for wet locations in any wall construction.

Electrical

- Fixture is wired with high performance LEDs or compact fluorescent lamps. Drivers and electronic ballast are universal voltage
- Housing provided with 1/2" conduit knockout on each side, suitable for 4 wire thru-wiring, 2 in 2 out
- Optional junction box allows 8 wire thru-wiring, 4 in 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" tapped conduit entrance in each side.

Mounting

Housing has flange with holes for mounting.

Catalog Numbers Lamps	Faceplate			
	Alum. Louver	Alum. Non-Louver	S.S. Louver	S.S. Non-Louver
LED 4.5W, (377 lm @ 3000°K)	<input type="checkbox"/> L2158W	<input type="checkbox"/> L2158GW	<input type="checkbox"/> L2158W-N	<input type="checkbox"/> L2158GW-N
LED 10.8W, (645 lm @ 3000°K)	<input type="checkbox"/> L2158W-HO	<input type="checkbox"/> L2158GW-HO	<input type="checkbox"/> L2158W-N-HO	<input type="checkbox"/> L2158GW-N-HO
One 9W, (CFT9W/2G7) compact fluorescent	<input type="checkbox"/> F2158W-9	<input type="checkbox"/> F2158GW-9	<input type="checkbox"/> F2158W-N-9	<input type="checkbox"/> F2158GW-N-9
One 13W, (CFT13W/2GX7) compact fluorescent	<input type="checkbox"/> F2158W-13	<input type="checkbox"/> F2158GW-13	<input type="checkbox"/> F2158W-N-13	<input type="checkbox"/> F2158GW-N-13
One 18W, (FT18W/2G11) compact fluorescent	<input type="checkbox"/> F2158W-18	<input type="checkbox"/> F2158GW-18	<input type="checkbox"/> F2158W-N-18	<input type="checkbox"/> F2158GW-N-18

Options

Junction box: Bottom or back mounted as required for feed-thru. Add suffix -J.

Tamperproof screws: Socket head faceplate screws. Add suffix -TP.

Dimming: Universal voltage 0-10V driver. Add suffix -DIM.

LED colors: 4000°K (438 lm), -HO (747 lm). Add suffix -4K.

Amber. Add suffix -AMB.

Blue. Add suffix -BLU.

Voltage: 277 ballast. Add suffix -277.

Alternate faceplate color: Black or white. Add suffix -BLK or -WHT.

Bronze faceplate: Satin finished, clear coated faceplate. Add suffix -B

Opal glass diffuser: Tempered. Add suffix -OPL.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
 2560 N. Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473

Fax (626) 443-9253

info@colelighting.com

www.colelighting.com