


JOB NAME _____

Type _____

CATALOG NUMBER _____

Steplites

L500 SERIES

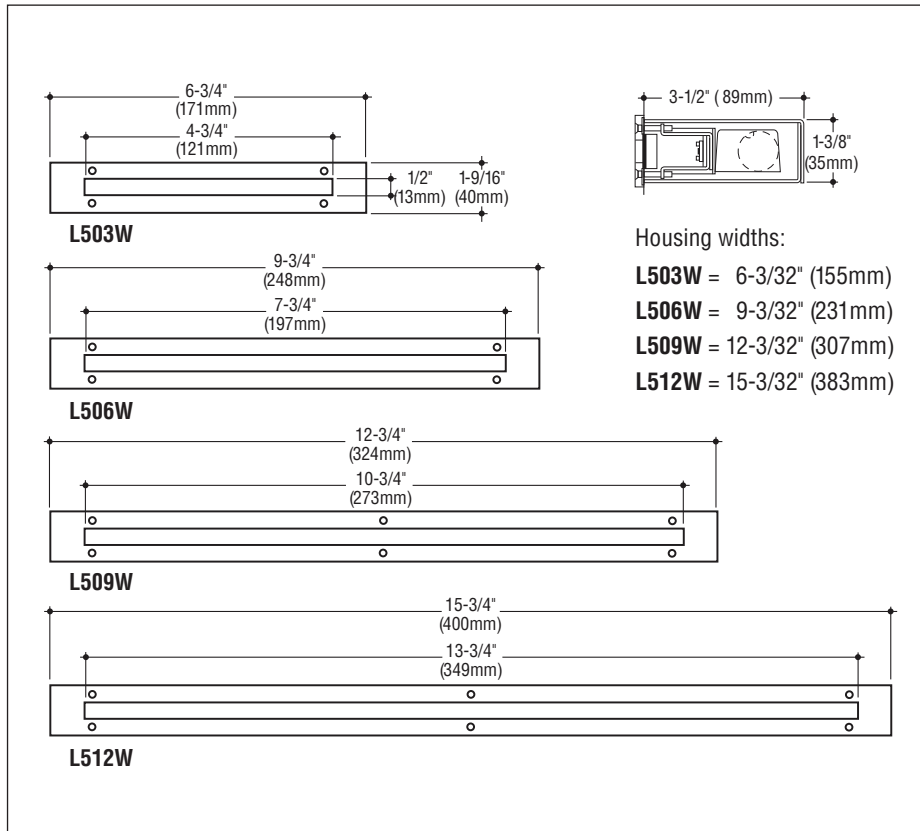

SPECIFICATIONS

Construction

- Housing is 16 gauge stainless steel • Faceplate is 3/16" satin finished stainless steel passivated for maximum rust resistance
- Fixtures are furnished with stainless steel socket head tamperproof screws • Diffuser is frosted tempered glass set in silicone sealant
- cETLus listed for wet locations in any wall construction.

Electrical

- Fixture is wired with high performance LEDs • Integral driver is universal voltage
- Housing provided with 1/2" conduit knockout on each side, suitable for 4 wire thru-wiring, 2 in and 2 out.

Mounting

Housing has flange with holes for mounting.

Catalog Number

Lamp

LED 1.5W, (126 lm @ 3000°K)	<input type="checkbox"/> L503W
LED 3.0W, (252 lm @ 3000°K)	<input type="checkbox"/> L506W
LED 4.5W, (377 lm @ 3000°K)	<input type="checkbox"/> L509W
LED 6.0W, (503 lm @ 3000°K)	<input type="checkbox"/> L512W

Options

Bronze faceplate: Satin finished, clear coated.

Add suffix **-B**.

Opal glass diffuser: Tempered. Add suffix **-OPL**.

LED colors:

4000°K (L503, 146 lm), (L506, 292 lm), (L509, 438 lm), (L512, 584 lm). Add suffix **-4K**.

Amber. Add suffix **-AMB**.

Blue. Add suffix **-BLU**.

Dimming: Universal voltage 0-10V driver.

Add suffix **-DIM**. (Not available on L503 model)

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
 2560 N. Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473
 Fax (626) 443-9253
 info@colelighting.com
www.colelighting.com