

JOB NAME _____

Type _____

CATALOG NUMBER _____

Steplites

300 SERIES

SPECIFICATIONS

Construction


- Fixture housing is constructed from die-formed 16 gauge electro-galvanized steel finished with a white polyester coating
- Faceplate is cast aluminum with silver metallic polyester finish or 3/16" stainless steel with brushed finish
- Diffuser on glass front and weatherproof louvered models is frosted tempered glass
- On weatherproof models, diffuser is set in silicone sealant and faceplate is retained by stainless steel screws
- Reflector is constructed of white die-formed aluminum
- Optional junction box is cast aluminum with polyester coating
- cETLus listed, suitable for wet locations when specified weatherproof, in any wall construction.

Electrical

- Fixture is wired with high performance LED or compact fluorescent. Drivers and electronic ballasts are universal voltage.

Mounting

Housing has flange with holes for mounting.

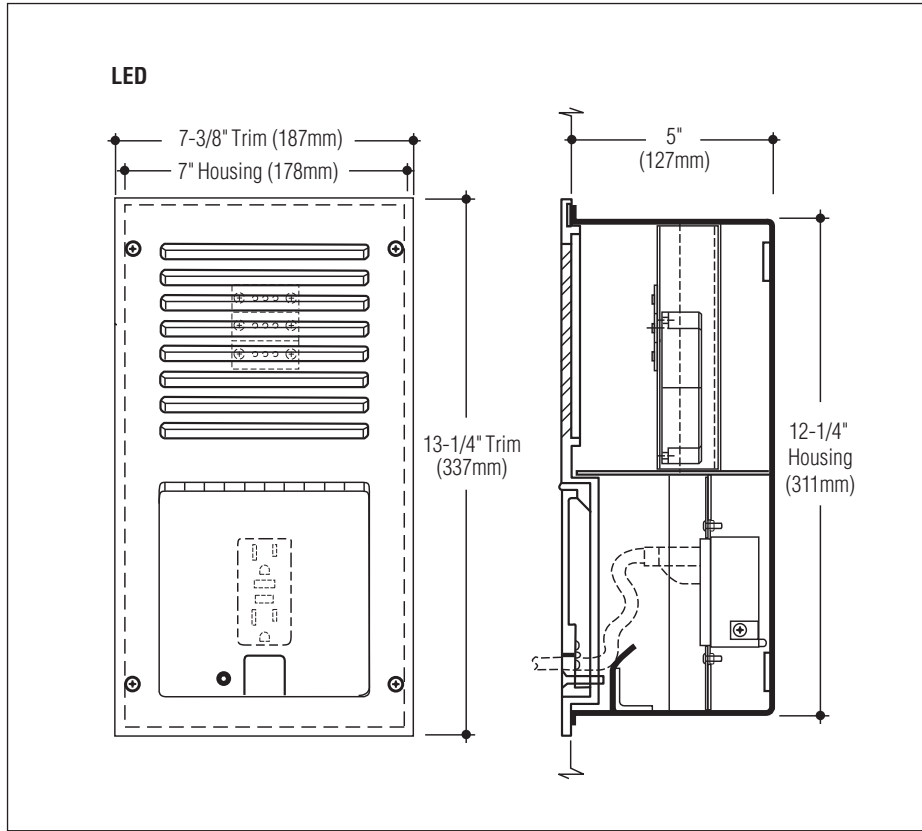

Catalog Number

Lamp

LED 4.2W, (260 lm @ 3000°K)
 LED 12.6W, (780 lm @ 3000°K)
 One 13W, (CFTR13W) fluorescent
 One 18W, (CFTR18W) fluorescent

- TLL300W
- TLL300W-HO
- TLF313W
- TLF318W

Options

LED color: 4100°K (285 lm), -HO (855 lm).

Add suffix -4K.

Dimming: Universal voltage 0-10V driver.

Add suffix -DIM.

Tamperproof screws: Socket head faceplate screws. Add suffix -TP.

Bronze faceplate: Satin finish, clear coated.

Add suffix -B.

Alternate faceplate color: Black or white.

Add suffix -BLK or -WHT.

Opal glass diffuser: Tempered.

Add suffix -OPL.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
 2560 N. Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473
 Fax (626) 443-9253
 info@colelighting.com
www.colelighting.com