


JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Steplites L111 SERIES

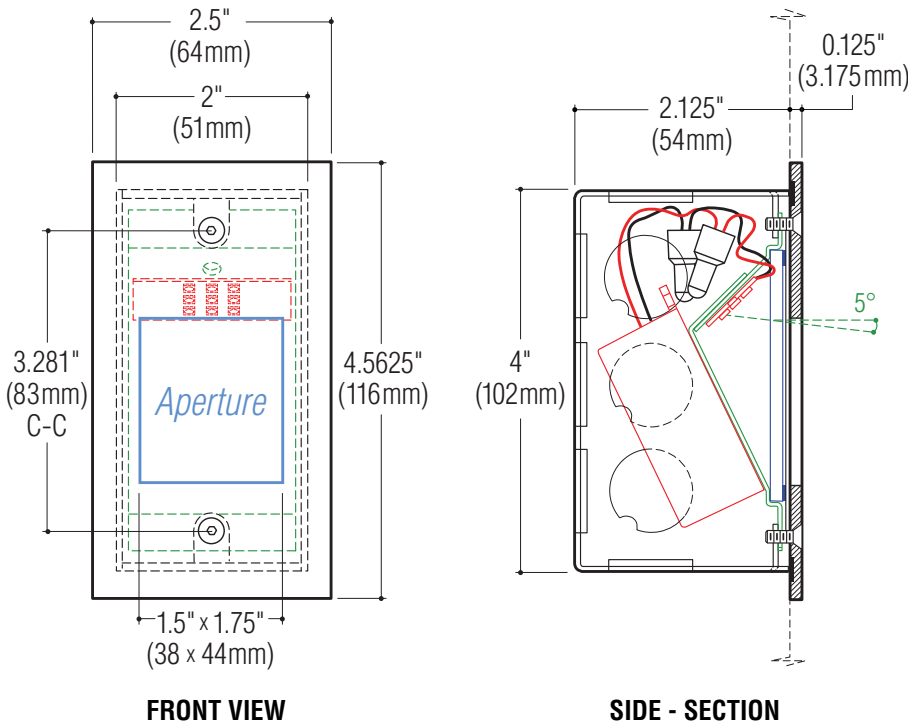

SPECIFICATIONS

Construction

- Furnished with a galvanized steel RACO® (Cat.# 670RAC) or equal, single-gang box
- Faceplates are 1/8" thick • Aluminum faceplates are powder coated white; Stainless steel are satin finished, passivated for maximum rust resistance
- Fixtures are furnished with stainless steel socket head tamperproof screws
- Diffuser is clear tempered glass, set in silicone sealant
- Internal baffle is coated matte black to eliminate LED glare
- cETLus listed installation in block and stud wall construction and suitable for wet locations.

Electrical

- 120V only
- Housing provided with multiple 1/2" conduit knockouts
- Fixture is wired with high performance LEDs
- Integral 120V driver features ELV dimming capability.

Mounting

Housing has holes for mounting.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

Catalog Number	Faceplate	
	Aluminum	Stainless Steel
LED 3.06W, (450 lm @ 3000°K)	<input type="checkbox"/> L111W-AL	<input type="checkbox"/> L111W-N

Lumens shown are source.
Photometric data available for Steplites can be downloaded at: www.colelighting.com/downloads/1

Options

LED colors: 4000°K (470 lm). Add suffix -4K.

Amber. Add suffix -AMB.

Blue. Add suffix -BLU.

Bronze faceplate: Satin finished, clear coated.
Add suffix -B.

Alternate trim color:

Metallic aluminum. Add suffix -ALU

Black. Add suffix -BLK

Custom color or finish (consult factory for choices). Add suffix -CC.

Antimicrobial white paint: Coating that resist bacterial growth. Add suffix -AM

Frosted glass diffuser: Tempered.
Add suffix -FG



C.W. Cole & Company, Inc.
2560 N. Rosemead Boulevard
South El Monte, CA 91733-1593

Tel. (626) 443-2473
Fax (626) 443-9253
info@colelighting.com
www.colelighting.com