

JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Interior/Exterior Applications

Exits

Slicker

Stainless Steel Exit Signs

SPECIFICATIONS

Construction


- Sign surface housing, faceplate, and bracket are constructed from 20 gauge 304 stainless steel with a brushed satin finish
- Recessed housing is 18 gauge steel, suitable for poured concrete construction
- Letters and arrows are stencil cut in faceplate, backed with .125" acrylic diffuser
- Ceiling/wall bracket is die-cast aluminum, painted black
- cETLus listed, suitable for wet locations when specified.

Electrical

- LEDs are dual voltage
- When emergency battery operation is specified, all components are contained in housing. Nickel cadmium battery, test light and button, and red or green LEDs are included with the -EM option.

Mounting

- Surface signs mount to junction box.
- Recessed housing has holes for mounting.

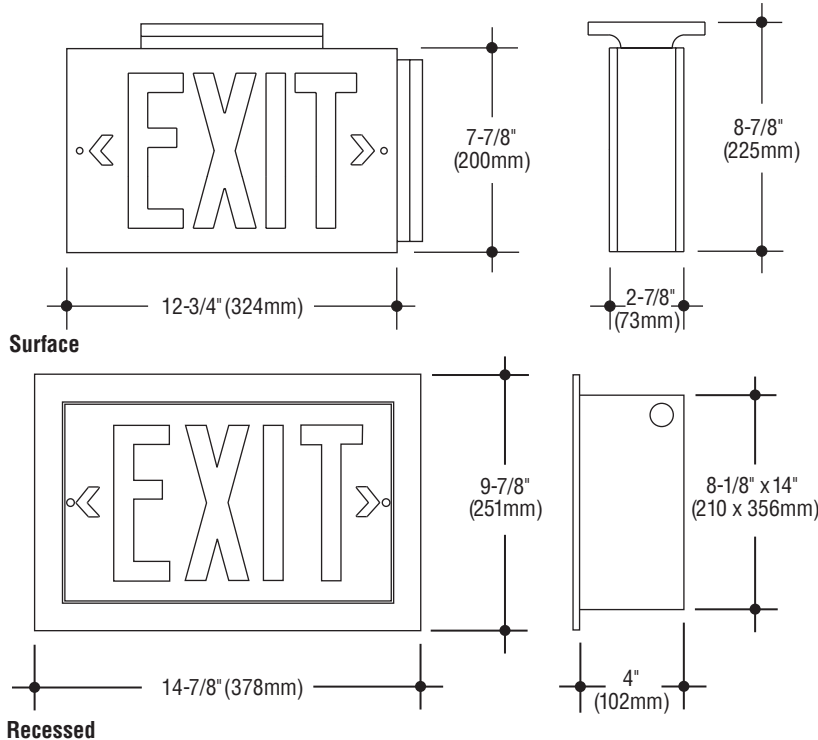

Doublehead arrows shown. Arrows only furnished as specified.

Catalog Numbers	Single Face			Double Face		
	Back	Ceiling	End	Recessed	Ceiling	End
LED .4W (Red), .3W (Green)	<input type="checkbox"/> LN205	<input type="checkbox"/> LN206	<input type="checkbox"/> LN208	<input type="checkbox"/> LN207	<input type="checkbox"/> LDN206	<input type="checkbox"/> LDN208

Required Suffixes

- Letter color -RED -GRN
- Voltage -120 -277

Options

Directional arrows:

- Arrow left, -AL.
- Arrow right, -AR.
- Doublehead -A2.
- Left and right (for double face), -A.

Tamperproof screws: Socket head faceplate screws. Add suffix -TP.

Emergency battery operation: Integral circuitry for 1½ hour LED operation.

Add suffix -EM.

Pendant mount: Provides canopy and 18" stem.

Use ceiling model number and add suffix -S1.

Pedestal mount: Provides threaded flange on bottom for 1-1/4" pipe. Add suffix -PED.

Weatherproof: Add suffix -W.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.



C.W. Cole & Company, Inc.
 2560 N. Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473
 Fax (626) 443-9253
 info@colelighting.com
www.colelighting.com