

JOB NAME _____

TYPE _____

CATALOG NUMBER _____

Steplites 2100/3300 SERIES

SPECIFICATIONS

Construction

- Fixture housing is constructed from die-formed 16 gauge electro-galvanized steel finished with a white polyester coating
- Faceplate is cast aluminum with metallic aluminum powder coating, gasketed and retained by stainless steel screws
- Diffuser is frosted tempered glass, set in silicone sealant
- Reflector is constructed of die-formed white aluminum
- Optional junction box is cast aluminum with polyester coating
- 2100 Series is cETLus listed suitable for wet locations in any wall construction; 3300 Series suitable for wet locations in concrete pour/block wall construction.

Electrical


- Fixture is wired for high performance LEDs, two compact fluorescent lamps or metal halide. Integral driver and ballasts are universal voltage
- Housing provided with 1/2" conduit knockout on each side suitable for 4 wire thru-wiring, 2 in and 2 out
- Optional junction box allows 8 wire thru-wiring, 4 in and 4 out. Provided with two 1/2" tapped conduit entrances in the bottom and one 1/2" tapped conduit entrance in each side.

Mounting

Housing has flanges with holes for mounting.

How to Specify

1. Select catalog number with desired features.
2. Add suffixes for options required to meet job conditions.

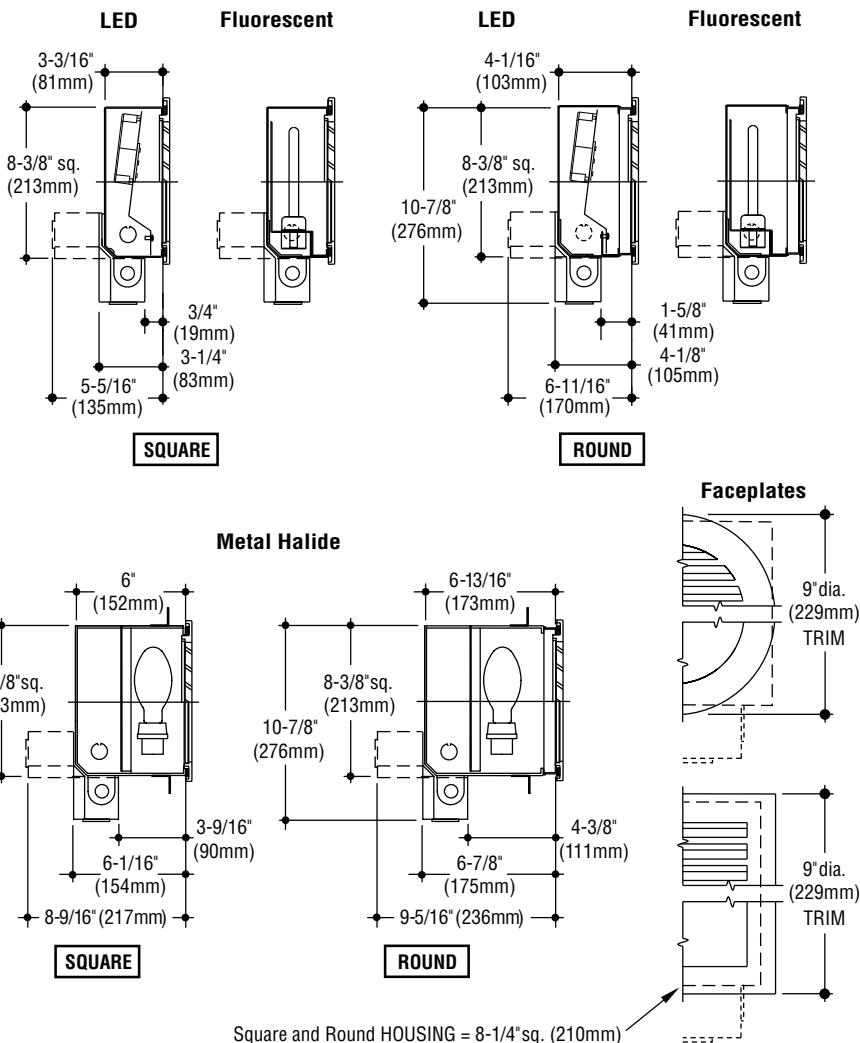

Catalog Numbers

Lamps

LED 12.6W, (780 lm @ 3000°K)
 Two 7W, (2G7 base) compact fluorescent
 Two 9W, (2G7 base) compact fluorescent
 Two 13W, (GX24q-1 base) compact fluor.
 50W metal halide, medium base

Faceplate

9" dia./Louver

L2100RW
 F2127RW
 F2129RW
 F2113RW
 HMH3350RW

9" dia./Non-Louver

L2100RGW
 F2127RGW
 F2129RGW
 F2113RGW
 HMH3350RGW

9" sq./Louver

L2100SW
 F2127SW
 F2129SW
 F2113SW
 HMH3350SW

9" sq./Non-Louver

L2100SGW
 F2127SGW
 F2129SGW
 F2113SGW
 HMH3350SGW

Photometric data available for Steplites can be downloaded at: www.colelighting.com/downloads/1

Options

Junction box: Bottom or back mounted as required for feed-thru. (Standard on 3300 Series)

Add suffix -J.

Bronze faceplate: Satin finished, clear coated.

Add suffix -B.

Tamperproof screws: Socket head faceplate screws. Add suffix -TP.

Alternate faceplate color: Black or white.

Add suffix -BLK or -WHT.

Voltage: 277 ballast. Add suffix -277.

Opal glass diffuser: Tempered.

Add suffix -OPL.

Dimming: Universal voltage, 0-10V driver.

Add suffix -DIM.

Emergency battery: (Fluorescent only) Provides up to 90 minutes operation and requires 6" (Square) or 6-13/16" (Round), deep housing. Add suffix -EM.

LED color:

4000°K (795 lm). Add suffix -4K.



C.W. Cole & Company, Inc.
 2560 N. Rosemead Boulevard
 South El Monte, CA 91733-1593

Tel. (626) 443-2473
 Fax (626) 443-9253
 info@colelighting.com
www.colelighting.com