


Installation Instruction Sheet

CATALOG NO.: KWL-612, KBL-612 & KCL-612

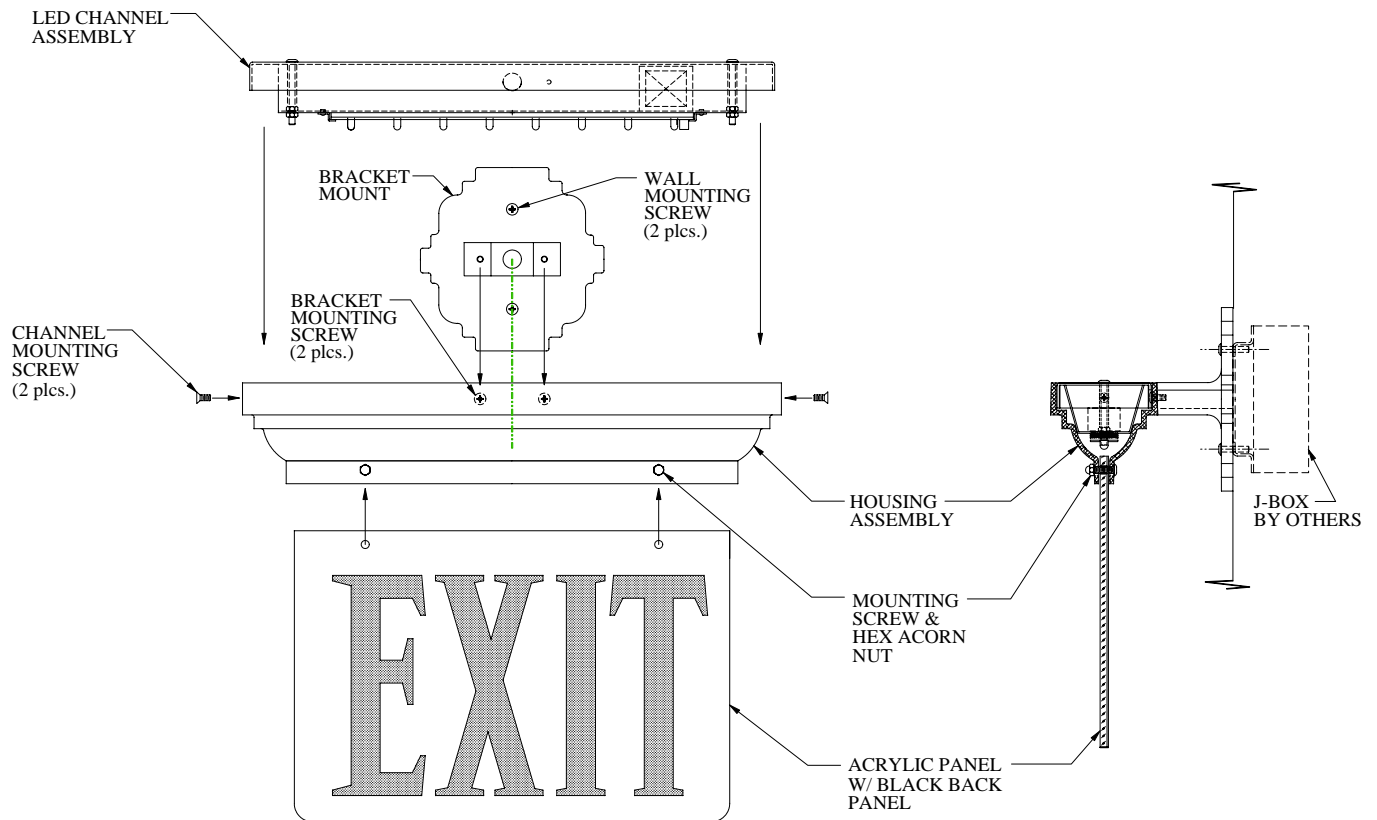

BACK, END, AND CEILING MOUNT INSTALLATION:

- Step 1. Turn off electrical power supplied to fixture.
- Step 2. Use provided 8-32 bracket mounting screws to attach, from inside housing, bracket mount to housing assembly (back mounting bracket shown).
- Step 3. Make wire connections from led assembly through bracket mount and into J-box (J-box by others).
- Step 4. Use included 6-32 channel mounting screws to attach led channel assembly into housing assembly.
- Step 5. Mount assembled fixture to wall (or ceiling) & J-box with 8-32 wall mounting screws supplied (J-box by others).
- Step 6. Attach acrylic panel with black back panel into bottom opening of housing assembly with 6-32 mounting screws & hex acorn nuts provided.

NOTE:

"THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED".