


CH 180 Series

Construction

- Diffuser is .125" white acrylic and canopy is 20 gauge steel
- Flat diffuser provided in bottom unless other options are selected
- Finish is textured powder coat polyester
- 3/4" x 1" wood accents are stained golden oak unless otherwise specified
- 7/8 O.D. stem or 7/32" chain is provided in length as required for specified overall suspended height


Electrical

- Integral multiple-lamp electronic ballasts are wired for 40 watt long compact or 32 watt T8 fluorescent lamps
- Lamps may be split into two circuits for remotely switched two-level illumination
- 120V-277V electronic ballasts are standard (347V optional)
- Optional single incandescent reflector lamp downlight has concentric louver assembly below for glare control
- Mounting plate above canopy mounts to ceiling structure and covers junction box
- Loop on stem meets seismic requirements

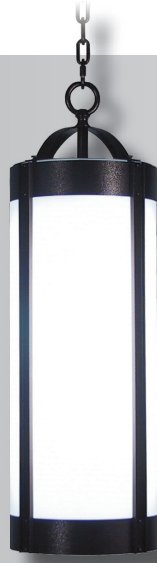

14" dia W x 36"H (356 x 914mm)

CH 180-6 illustrated
with options:
Metal Channel Accents **-MCA**
Hanging Yoke **-HK**
Chain Suspension **-CHN**
Finish Color **-ABZ**

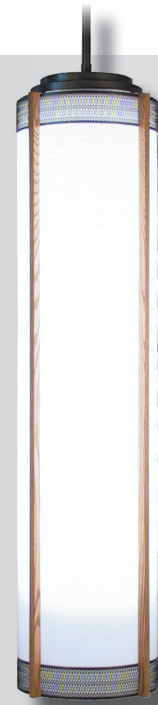

14" dia W x 60"H (356 x 1524mm)

CH 182-4 illustrated
with options:
Downlight **-DL**
Decorative Banding **-DB**
Extended Top **-ET**
Stem Suspension **-STM**
Finish Color **-ABZ**

Catalog Number

| Lamps | 4 lamps | 6 lamps | 8 lamps | 9 lamps |
|---|-----------------|-------------------|-----------------|-------------------|
| 40W compact fluorescent (FT40W/2G11/RS) | CH 180-4 | CH 180-6 | CH 180-8 | |
| 32W T8 fluorescent (F32T8) | CH 182-4 | CH 182-6 | CH 182-8 | |
| Six 100W A19 maximum incandescent | | CH 180-INC | | |
| Nine 100W A19 maximum incandescent | | | | CH 182-INC |
| Example: CH 180-4-MCA-HK-CHN-ABZ-55" | | | | |

Options

Suspension: Black chain: Add suffix **-CHN**.

Black stem: Add suffix **-STM**.

Finish Color: Antique bronze vein: Add suffix **-ABZ**. Antique Copper Vein: Add suffix **-ACP**.

Downlight: Single medium base socket at bottom for 300 watt (max.) incandescent reflector lamp. Includes concentric louver in lieu of bottom diffuser. Add suffix **-DL**.

Hanging Yoke: Provides alternate connection from chain to fixture body. Not with **-ET**. Add suffix **-HK**.

Extended Top: Provides stepped top structure for alternate appearance. Not with **-HK**. Add suffix **-ET**.

Delete Wood Accents: Add suffix **-DWA**.

Metal Channel Accents: Provides steel side channels in lieu of wood. Add suffix **-MCA**.

Dimming Ballasts: For use with Advance Mark X two-wire control system for 5%-100% range. Add suffix **-DIM**.

Ballasts: 277V, 347V. Add suffix **-277**, **-347**.