


CH 170 Series

Construction

- Diffuser is .125" white acrylic and canopy is 20 gauge steel
- Flat diffuser provided in bottom unless other options are selected
- Finish is textured powder coat polyester
- 3/4" x 1" wood accents are stained golden oak unless otherwise specified
- 7/8 O.D. stem or 7/32" chain is provided in length as required for specified overall suspended height

Electrical

- Integral multiple-lamp electronic ballasts are wired for 40 watt long compact or 32 watt T8 fluorescent lamps
- Lamps may be split into two circuits for remotely switched two-level illumination
- 120V-277V electronic ballasts are standard (347V optional)
- Optional single incandescent reflector lamp downlight has concentric louver assembly below for glare control
- Mounting plate above canopy mounts to ceiling structure and covers junction box
- Loop on stem meets seismic requirements

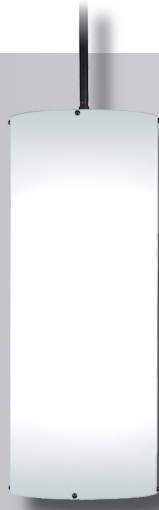

14" dia. W x 36"H (356 x 914mm)

CH 170-6 illustrated with options:
 Downlight **-DL**
 Delete Wood Accents **-DWA**
 Stem Suspension **-STM**
 Finish Color **-ABZ**



14" dia. W x 60"H (356 x 1524mm)

CH 172-4 illustrated with options:
 Chain Suspension **-CHN**
 Finish Color **-ABZ**

Catalog Number

Lamps	4 lamps	6 lamps	8 lamps	9 lamps
40W compact fluorescent (FT40W/2G11/RS)	CH 170-4	CH 170-6	CH 170-8	
32W T8 fluorescent (F32T8)	CH 172-4	CH 172-6	CH 172-8	
Six 100W A19 maximum incandescent		CH 170-INC		
Nine 100W A19 maximum incandescent				CH 172-INC
<i>Example: CH 170-6-DL-STM-DWA-ABZ-55"</i>				

Options

Suspension: Black chain: Add suffix **-CHN**.
 Black stem: Add suffix **-STM**.
Finish Color: Antique bronze vein: Add suffix **-ABZ**. Antique Copper Vein: Add suffix **-ACP**.
Downlight: Provides single medium base socket at bottom for 300 watt (max.) incandescent reflector lamp. Includes concentric louver in lieu of bottom diffuser. Add suffix **-DL**.
Dimming Ballasts: For use with Advance Mark X two-wire control system for 5%-100% range. Add suffix **-DIM**.

Delete Wood Accents: Add suffix **-DWA**.
Metal Channel Accents: Provides steel side channels in lieu of wood. Add suffix **-MCA**.
Ballasts: 277V, 347V. Add suffix **-277**, **-347**.